



## MensolaPiù

### Aluminum radiator




### "Più" telescopic bracket

#### APPLICATION

Aluminum radiator fastening.

#### FEATURES AND BENEFITS

- > The **best aesthetic result** is guaranteed by the **bevelled tip**.
- > **Pinpoint adjustment** of radiator's distance from the wall.
- > Its exclusive **shape** perfectly fits to aluminum radiators' shanks.
- > **The appealing packaging** of transparent blister packs make this product particularly suitable to self-service distribution.

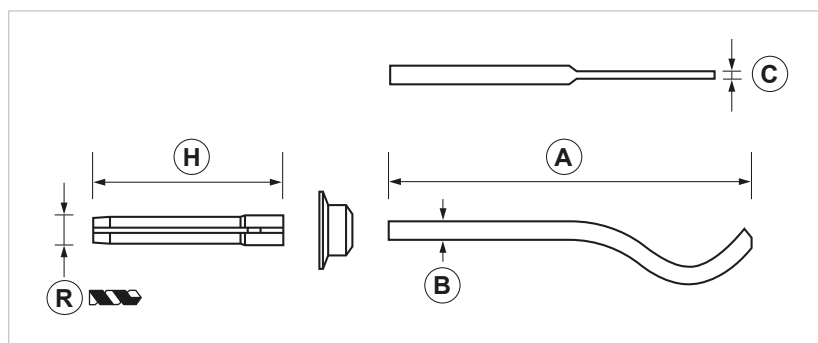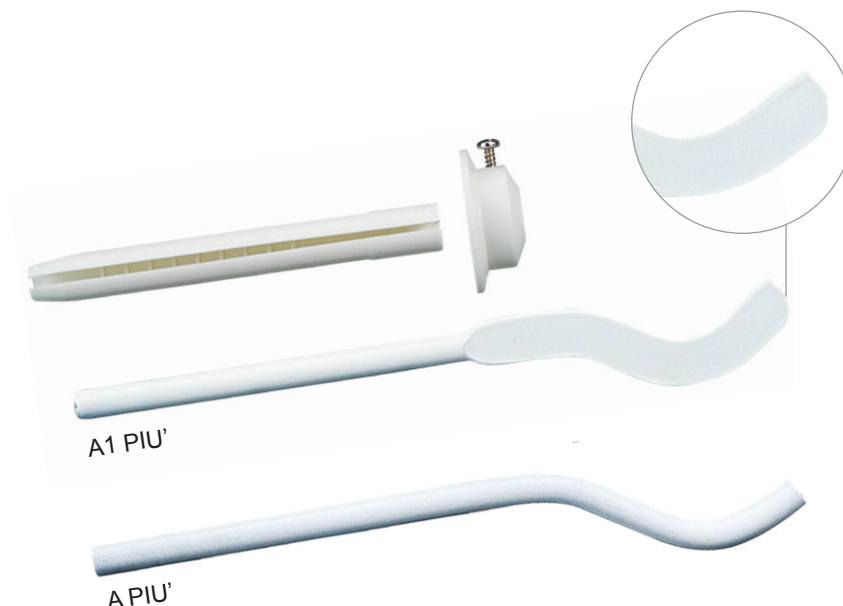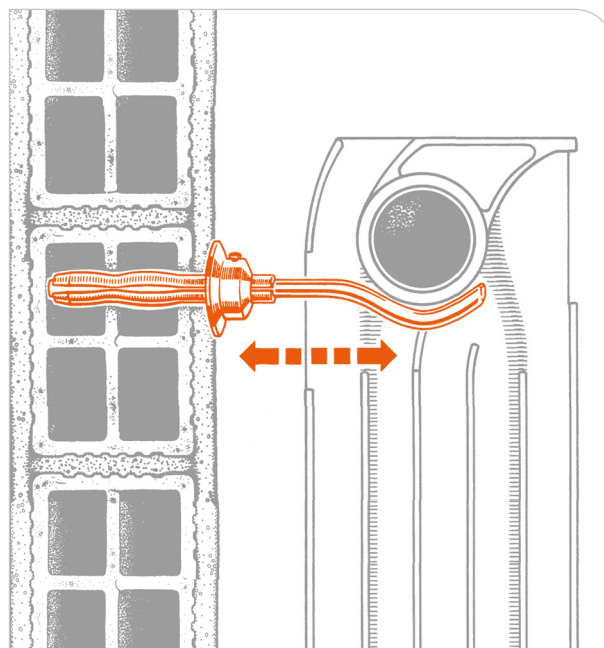

COD	TYPE	Application	Finishing	A	B	C	H	R
313001	A più	Circular section	white painted	179	7	*	101	10
313101	A1 più	Narrow shanks	white painted	179	7	3,5	101	10

\* Standard bracket with circular section.



## MATERIAL TECHNICAL DATA

### BRACKET

Carbon steel S235JR - EN10027


### PLUG, COVER WASHER AND CAM WASHERS

PE White Polyethylene

### BASE MATERIAL

Masonry | Plastered hollow brick | Concrete

### RECOMMENDED LOADS

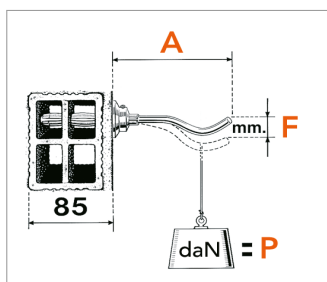

	A	F	P
A/A1	100	3,5	25
A/A1	110	3,5	18
A/A1	120	3,5	15

Recommended loads refer to the single bracket. The payload defines the metal bracket capacity, not the wall one.

Recommended load is the average resistance loads with a safety coefficient.

1 daN=1 kg.

### INSTALLATION

In order to properly install the plug, make a hole perpendicularly to the base support using a drill bit of 10 mm diameter. Before applying the plug, the hole must be cleaned up and the drilling dust removed. We recommend not to use an impact drill to make the hole on an hollow bricks wall in order to prevent internal bulkheads breakage.

Insert the plug and then the bracket by using a hammer. Add the cover washer and adjust the bracket.

Fix the bracket by screwing the screw set in the washer.

Eventually, install the radiator checking it is properly adjusted.

### INSTALLATION TOOLS AND RECOMMENDATIONS

Drill with appropriate drill bit.

Do not use impact drill in order to prevent internal bulkheads breakage.

### PACKAGING

Pair of brackets | In polyethylene bag

### RELATED ITEMS

> Universal jig for radiator connections

> Spare plug for radiator brackets

### DATA 03-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – [www.gia.it](http://www.gia.it)