




### Telescopic bracket for lamellar radiators

#### APPLICATION

Lamellar radiators fastening.

#### FEATURES AND BENEFITS

- > It makes radiators installation on wall **faster and easier**.
- > It ensures a **pinpoint adjustment** of the radiator's distance from the wall.
- > Its exclusive **shape** perfectly fits to lamellar radiators.

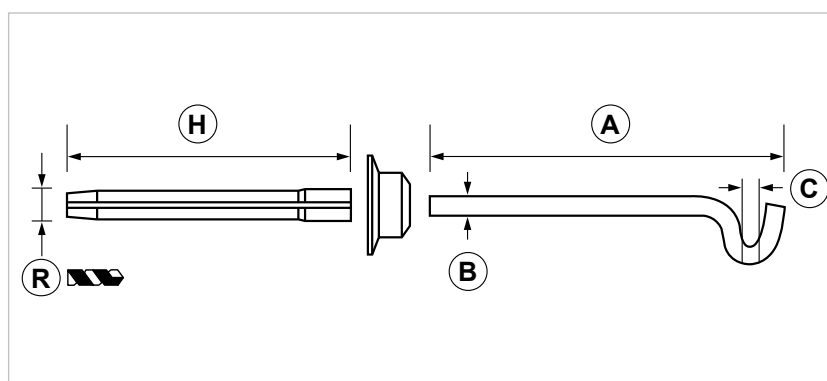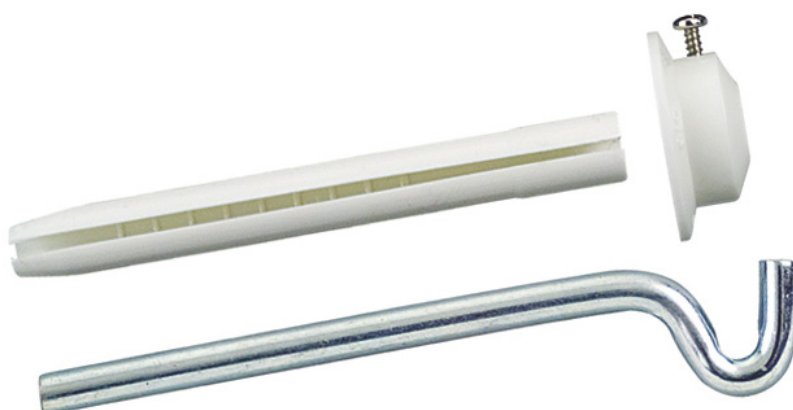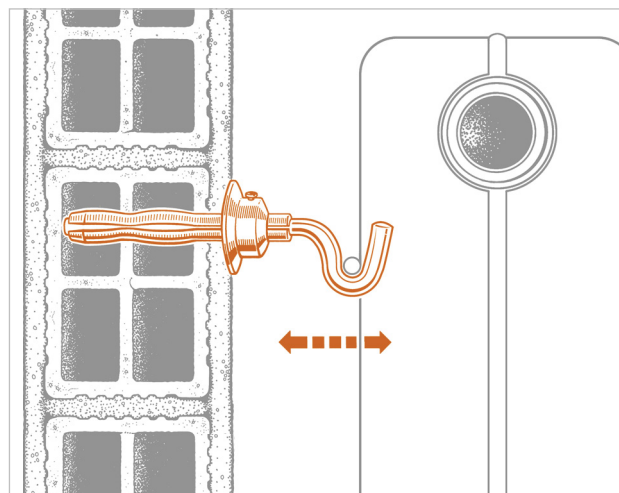

COD	TYPE	Application	Finitura	A	B	C	H	R
015000	AC1	steel lamellar radiators	galvanized	129	7	5	101	10
015100	AC2	steel lamellar radiators	galvanized	205	7	5	101	10

# TELESCOPIC BRACKET

## RADIATORS FIXINGS

### MATERIAL TECHNICAL DATA

#### BRACKET

Carbon steel S235JR - EN10027


#### PLUG AND COVERING WASHER

PE White Polyethylene

#### BASE MATERIAL

Masonry - Plastered hollow brick - Concrete

### RECOMMENDED LOADS

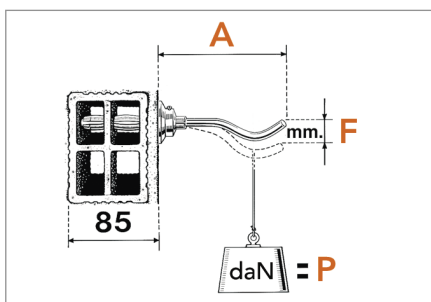

	A	F	P
AC1	45	1,5	50
AC2	120	3,5	10

Recommended loads refer to the single bracket. The payload defines the metal bracket capacity, not the wall one.

Recommended load is the average load capacity with a safety coefficient.

1daN=1 kg.

### INSTALLATION

In order to properly install the plug, make a hole perpendicularly to the base support using the right drill bit. Before applying the plug, the hole must be cleaned up and the drilling dust removed. We recommend not to use an impact drill to make the hole on an hollow bricks wall in order to prevent internal bulkheads breakage. Insert the plug and then the bracket by using a hammer. Add the covering washer and adjust the bracket. Fix the bracket by screwing the screw set in the washer. Eventually, install the radiator checking it is properly adjusted.

### INSTALLATION TOOLS AND RECOMMENDATIONS

Drill with proper drill bit.

Do not use impact drill in order to prevent internal bulkheads breakage.

### PACKAGING

In polyethylene bags - Pair of brackets

### RELATED ITEMS

- > Universal jig for radiator connections
- > Spare plug for radiator brackets

### DATE 05-2022 REV. 00

The current technical data sheet substitutes and nullifies the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing techical features and molds without previous notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – [www.gia.it](http://www.gia.it)