




Perforated steel band

APPLICATION

Used to fasten pipelines on the floor, on wall or even hanging ones.

FEATURES AND BENEFITS

- > **Hole punched band** with 1 or 5 holes.
- > **Different lengths and thicknesses** are available to afford different needs.
- > **Versatile and adaptable** to any shape.
- > Its **plastic container** helps to use the product safely and it also prevents it from unwrapping, which can be both inefficient and dangerous while working at the building site.
- > **Easy to cut** and shape.

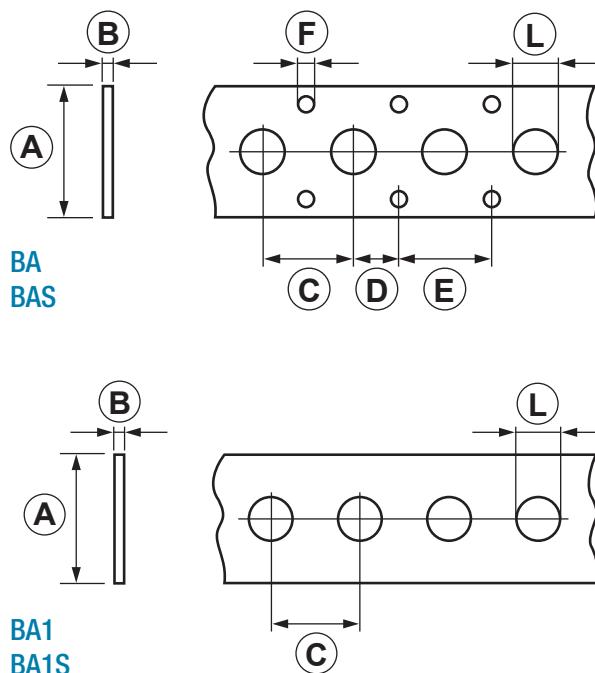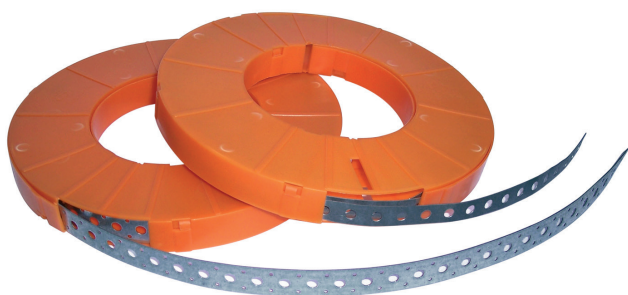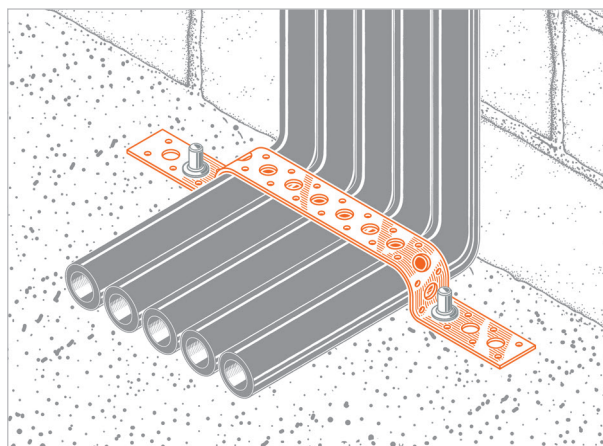

COD	TYPE	A	B	C	D	E	F	L	Length (mt)
072001	BA	20	0,8	15	7,5	15	2,5	6,3	20
072003	BAS	17	0,7	12	6	12	3	6,3	10
072006	BA1	14	0,5	15	-	-	-	6,3	30
072008	BA1S	12	0,7	9	-	-	-	5	10

FIXING'S ACCESSORIES


PERFORATED BANDS

MATERIALS TECHNICAL DATA

MATERIAL

Steel DX 51D EN 10346 with sendzimir galvanization Z200

RECOMMENDED LOADS

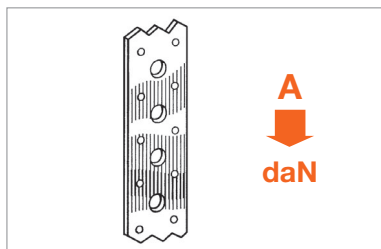

TYPE	A
BA	70
BAS	56
BA1	35
BA1S	50

Recommended load is the average resistance loads with a safety coefficient.
Data expressed in daN.
1daN=1kg.

INSTALLATION TOOLS AND RECOMMENDATIONS

It is suitable to be used with nail gun and nails.

PACKAGING

In neoprene shaped container.

RELATED ITEMS

- > CC - Band fixing nail
- > PCC - Nail setting tool

DATE 11-2022 REV. 01

The current technical data sheet substitutes and nullifies the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation. Gia S.p.A. reserves the right of changing technical features and molds without previous notice. Company under the management of "Ethica Global Investments S.p.A."

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it