





Perforated steel band

APPLICATION


Fixing item for floor, wall or wall hung fastened pipelines.
Also used to support pipelines or air ducts.

FEATURES AND BENEFITS


- > **Hole punched** band with 1 or 5 holes.
- > **Different lengths and thicknesses available** to afford different needs.
- > **Versatile and adaptable** to any shape.
- > Its **plastic container** helps to use the product safely and it also prevents unwanted unwindings, which can be both inefficient and dangerous while working at the building site.
- > **Easy** to cut and shape.

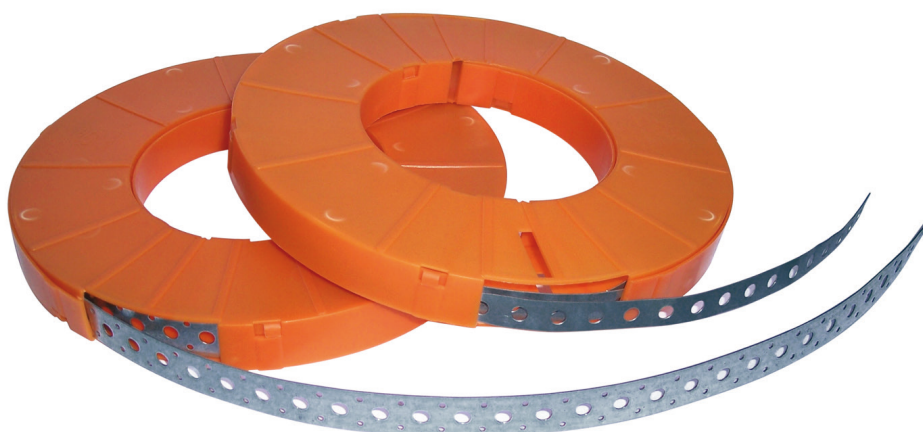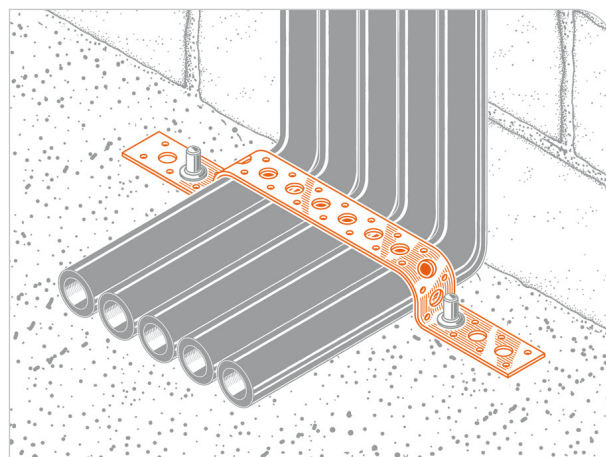

BA
BAS

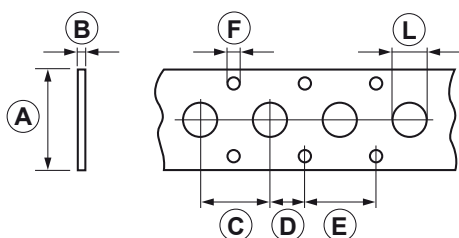

BA1
BA1S

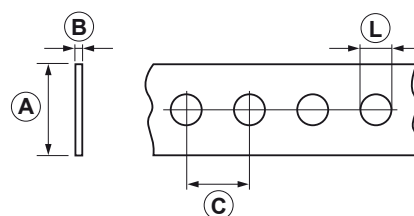

COD	TYPE	A	B	C	D	E	F	L	Length (mt)
072001	BA	20	0,8	15	7,5	15	2,5	6,3	20
072003	BAS	17	0,7	12	6	12	3	6,3	10
072006	BA1	14	0,5	15	-	-	-	6,3	30
072008	BA1S	12	0,7	9	-	-	-	5	10



MATERIALS TECHNICAL DATA

MATERIAL

Steel DX 51D EN 10142 with sendzimir galvanisation Z200

RECOMMENDED LOADS



TYPE	A
BA	70
BAS	56
BA1	35
BA1S	50

Recommended load is the average resistance loads with a safety coefficient.
Data expressed in daN.
1 daN=1kg.

INSTALLATION TOOLS AND RECOMMENDATIONS

It is suitable to be used with nail gun and nails.

PACKAGING

In neoprene container

RELATED ITEMS

- > Band fixing nail - CC
- > Nail setting tool - PCC

DATE 07-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it

T 04.21.100 REV 0

