



### THREADED ROD for chemical anchor

#### APPLICATION

Used to for chemical anchor installations.

#### FEATURES AND BENEFITS

- > **Class 5.8** threaded rod with 45° shear, and provided with **nut and washer**.
- > Thanks to the **45° shear** it is easier to insert the rod into the anchor.

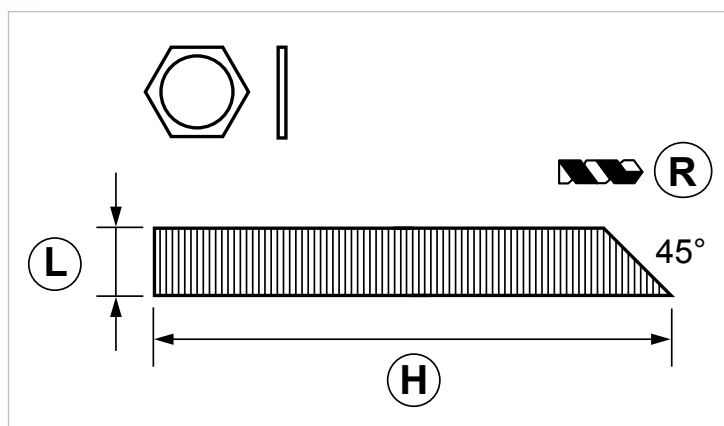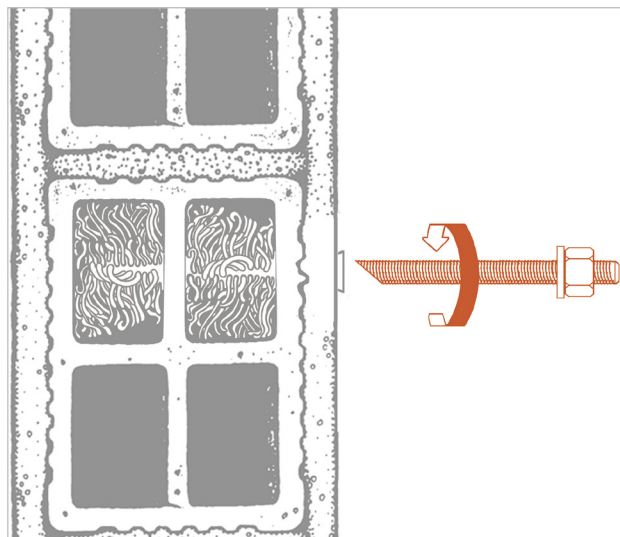

COD	TYPE	Min. drilling depth (mm)	Max. fixing thickness (mm)	R	H	L
155025	BF 8X110	80	10	10	110	M8
155030	BF 10X110	90	10	12	110	M10
155034	BF 10X160	90	60	12	160	M10
155040	BF 12X115	110	10	14	115	M12

Make sure to insert the product by screwing it into the base material.

# ANCHORS AND SEALANTS

## SILICONE SEALANTS AND CHEMICAL ANCHORS

### MATERIALS TECHNICAL DATA

#### ROD

Steel 5.8 EN ISO 898.1 with electro zinc plating 7-8 µm

### BASE MATERIAL

Masonry - Concrete

### INSTALLING TOOLS AND RECOMMENDATIONS

It is recommended to insert the product by screwing it into the base material.

### PACKAGING

In cardboard box

### RELATED ITEMS

- > TCH PE 300 / 165 - Styrene free chemical anchor
- > Reticulated sleeve

### DATE 06-2023 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – [www.gia.it](http://www.gia.it)