






Threaded rod

APPLICATION

Used to connect pipe clamps on masonry, pipe clamps with strut channels, two pipe clamps together.

FEATURES AND BENEFITS

> Provided in bars 1 mt - 2 mt long.

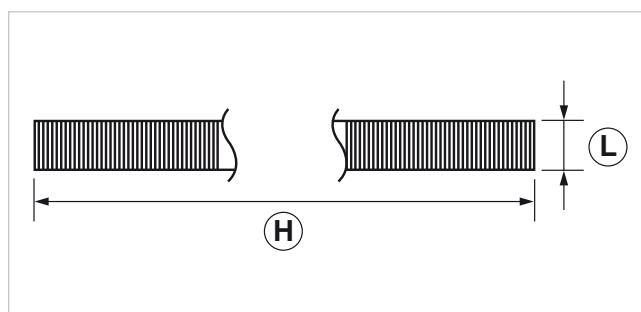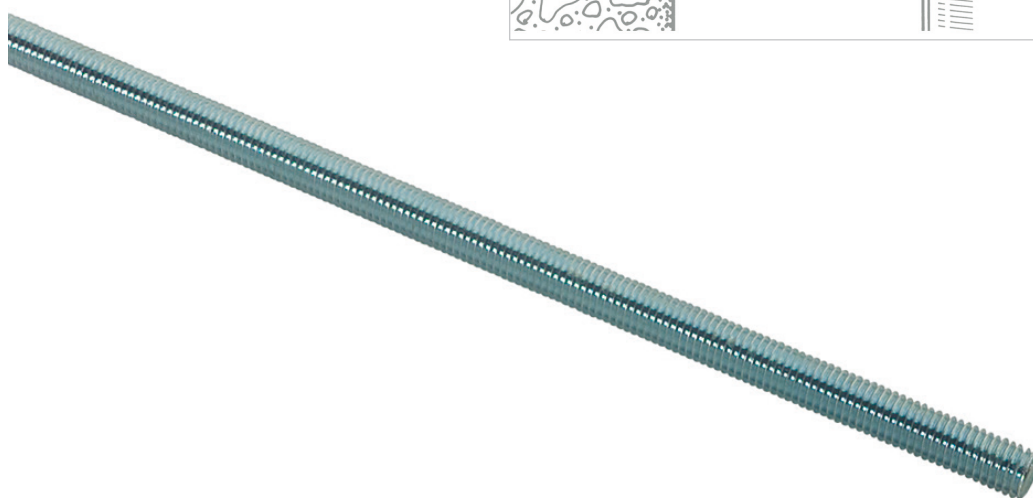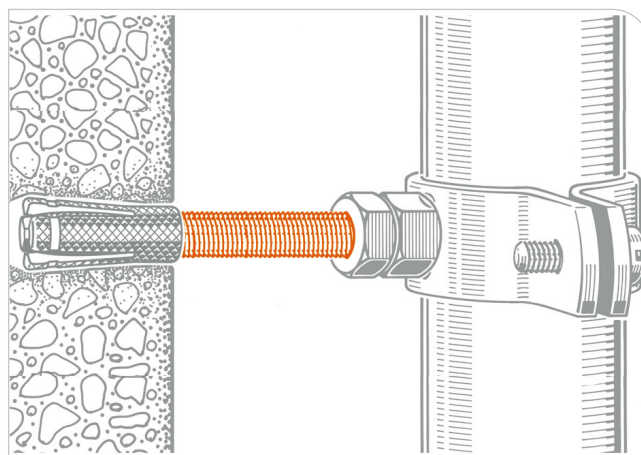

COD	TYPE	H	L
264900	BF/ 6	1000	M6
265000	BF/ 8	1000	M8
265100	BF/10	1000	M10
265200	BF/12	1000	M12
265300	BF/14	1000	M14
265400	BF/16	1000	M16
265500	BF/18	1000	M18
265600	BF/20	1000	M20
265002	BF2/ 8	2000	M8
265102	BF2/10	2000	M10




MATERIALS TECHNICAL DATA

MATERIAL

Steel 4.8 EN ISO 898.1 with electro zinc plating 7-8 μm

RECOMMENDED LOADS

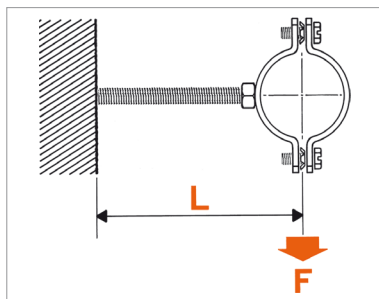

TYPE	50 mm	100 mm	150 mm	200 mm	250 mm	300 mm
BF/ 6	4	2	1,3	0,7	0,3	0,2
BF/ 8	10	5	3,3	2,5	1,3	0,7
BF/10	20	10	6,6	5	3,2	1,9
BF/12	35	17,5	11,6	8,7	6,8	4
BF2/ 8	10	5	3,3	2,5	1,3	0,7
BF2/10	20	10	6,6	5	3,2	1,9

Recommended load is the average resistance loads with a safety coefficient. Data provided in daN. 1 daN=1 kg
 $F = \text{daN}$ / Recommended strength = $f_{\text{max}} = 3 \text{ mm}$ / Affordable stress = $\sigma_{\text{am}} = 16 \text{ daN/mm}^2$.

PACKAGING

In bundle

DATE 07-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it

T 04.22.110 REV 0

