
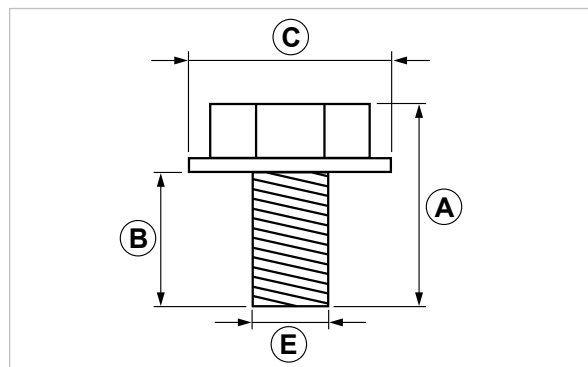


BU Flanged bolt

APPLICATION

Used to connect **DR-PF/ PF1/ PF7/ PF2-ANG/ ANGP.**

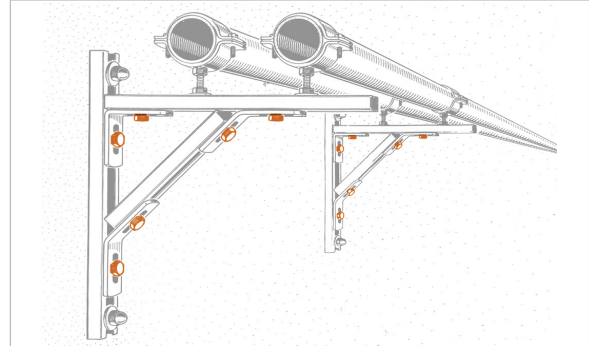

COD	TYPE	Hex head	A	B	C	E
164500	BU 8	13	21	14	18	M8
164503	BU 8X20	13	28	20	18	M8
164511	BU 10	17	25	16	21	M10
164513	BU 10X25	17	34	25	21	M10

MATERIALS TECHNICAL DATA

BOLT

Steel 4.8 EN ISO 898.1 with electro zinc plating 7-8 µm

PACKAGING

In polyethylene bags

RELATED ITEMS

> Brackets and strut channels

DATE 06-2023 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it