




Bevelled telescopic bracket for tubular radiators

APPLICATION

Fissaggio di radiatori **tubolari**.

FEATURES AND BENEFITS

- > It makes radiators installation on wall **faster and easier**.
- > It ensures a **pinpoint adjustment** of the radiator's distance from the wall.
- > The **best aesthetic result** is guaranteed by the exclusive bevelled tip.
- > Its exclusive **shape** perfectly fits to tubular radiators.

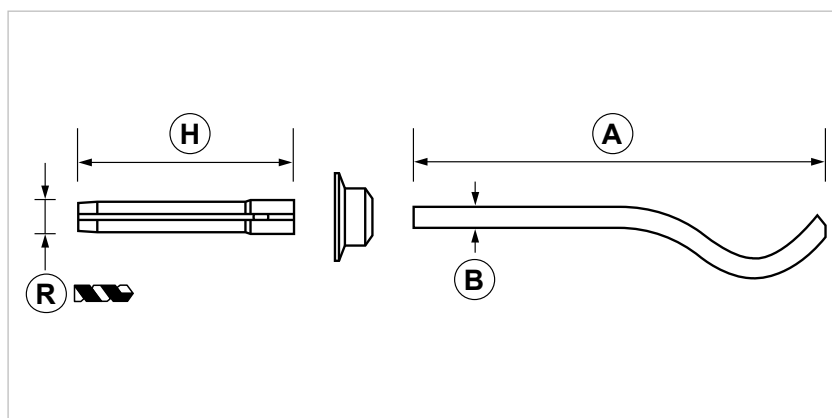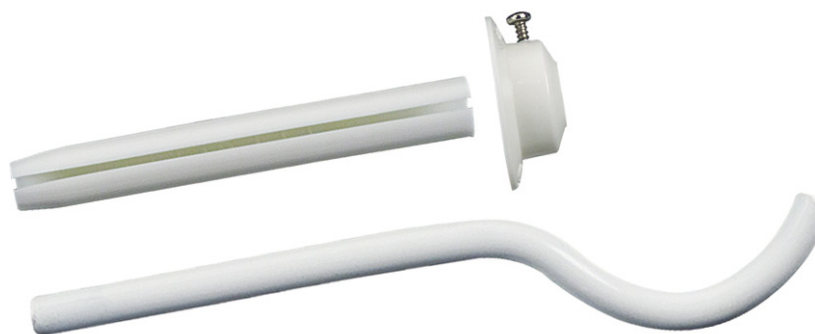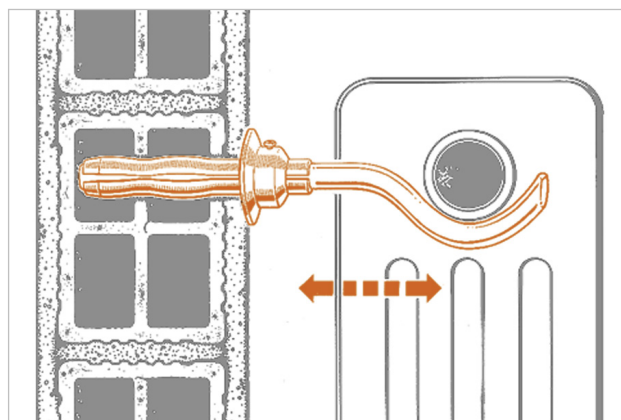

COD	TYPE	Application	Finishing	A	B	H	R
012201	C3 BIANCA	2 / 3 columns	white painted	179	9	100	12
012301	C4 BIANCA	3 / 4 columns	white painted	207	9	100	12

TELESCOPIC BRACKET

RADIATORS FIXINGS

MATERIALS TECHNICAL DATA

BRACKET

Carbon steel S235JR - EN10027


PLUG AND COVERING WASHER

PE White polyethylene

BASE MATERIAL

Masonry - Plastered hollow brick - Concrete

RECOMMENDED LOADS

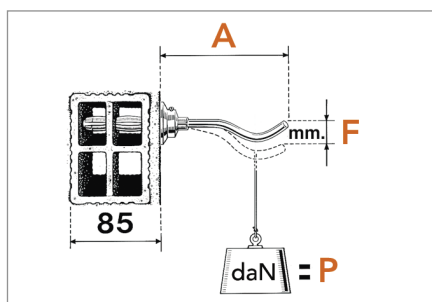

	A	F	P
C3	90	3,5	60
C4	122	3,5	40

Recommended loads refer to the single bracket. The payload defines the metal bracket capacity, not the wall one.

Recommended load is the average load capacity with a safety coefficient.

1daN=1 kg.

INSTALLATION

In order to properly install the plug, make a hole perpendicularly to the base support using the right drill bit. Before applying the plug, the hole must be cleaned up and the drilling dust removed. We recommend not to use an impact drill to make the hole on an hollow bricks wall in order to prevent internal bulkheads breakage.

Insert the plug and then the bracket by using a hammer.

Add the covering washer and adjust the bracket. Fix the bracket by screwing the screw set in the washer.

Eventually, install the radiator checking it is properly adjusted.

INSTALLATION TOOLS AND RECOMMENDATIONS

Drill with appropriate drill bit.

Do not use impact drill in order to prevent internal bulkheads breakage.

PACKAGING

In polyethylene bags - Pair of brackets

RELATED ITEMS

- > Universal jig for radiator connections
- > Spare plug for radiator brackets

DATE 05-2022 REV. 00

The current technical data sheet substitutes and nullifies the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without previous notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it