
Hook

APPLICATION


Used to fasten water heaters and boilers with chemical anchors.

FEATURES AND BENEFITS

> Easy to install thanks to the threaded design.





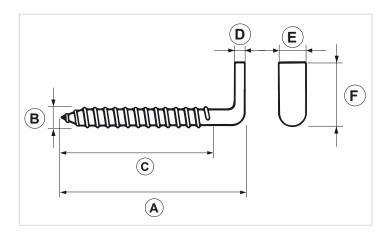

COD	ТҮРЕ	Min. hole depth (mm)	Α	В	С	D	E	F
155020	CA 10	70	94	10	60	4	13,5	30





MATERIALS TECHNICAL DATA

MATERIAL

Steel 4.8 EN ISO 898.1 with electro zinc plating 7-8 µm

BASE MATERIAL

Masonry | Concrete

PACKAGING

In cardboard box

RELATED ITEMS

- > TCH PE 300 / 165 Professional styrene free chemical anchor
- > Reticulated sleeve
- > TG hook and Giolli plug

DATA 09-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation. Gia S.p.A. reserves the right of changing techical features and molds without notice.

Gia S.p.A. - Via Sac. A. Cremona, 12 - 28069 Trecate (NO) - www.gia.it

T 05.28.141 REV 0

