



FRD Double fast fixing clamp support

APPLICATION

It is used to fasten light duty pipe lines on the wall.

FEATURES AND BENEFITS

- > **Handy** and **light duty double support**, it can be inserted using **a hammer**.
- > Versatile: suitable **for any kind of masonry**, it allows an easy and fast installation. You just have to make a hole on the wall and fit the support with a hammer.

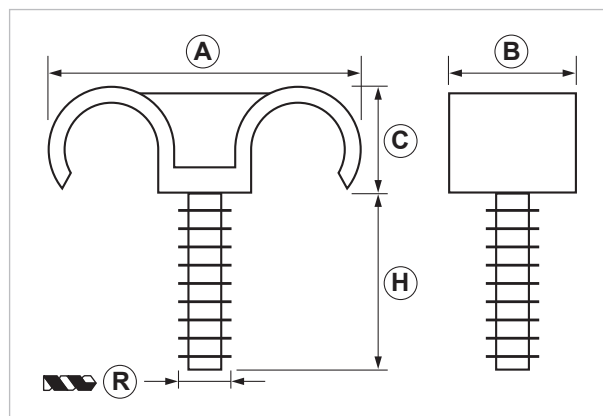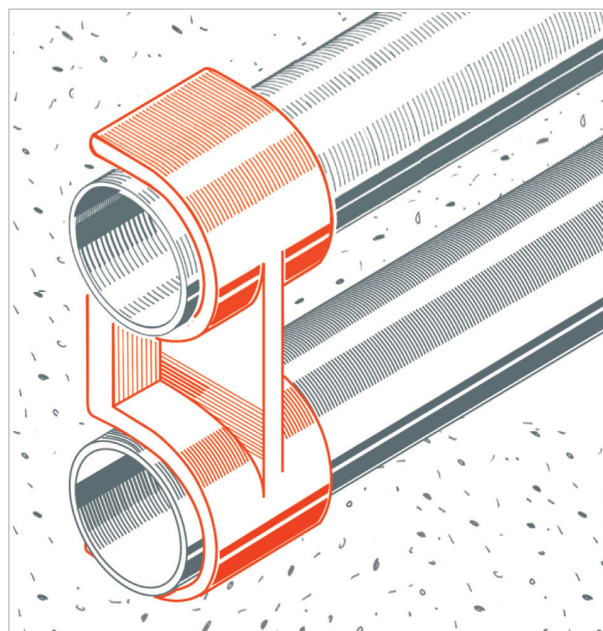

COD	TYPE	For pipes Ø mm	A	B	C	H	R
090610	FRD 16	16-17	45	20	16,5	31	8
090620	FRD 18	18-19	50,50	20	19,5	31	8
090630	FRD 20	20-21	54,50	20	20,5	31	8
090640	FRD 22	22-23	58,50	20	23,5	31	8
090660	FRD 25	25-26	64,50	20	26,5	31	8

NYLON PIPE CLAMPS

PIPE CLAMPS AND PIPE LINES FIXINGS

MATERIALS TECHNICAL DATA

PIPE CLAMP

Polyamide PA6

FIRE RESISTANCE

V2 - UL94 (1.6mm)


PLUG DIAMETER

Ø 8

BASE MATERIAL

Masonry - Hollow brick - Concrete

RECOMMENDED LOADS

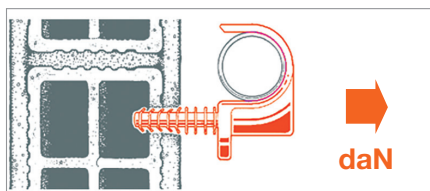

Recommended load is the average resistance load with a safety coefficient. Data are expressed in daN. 1daN=1kg.

TYPE	Hollow brick	Concrete
FRD 16	20	20
FRD 18	20	20
FRD 20	20	20
FRD 22	20	20
FRD 25	20	20

INSTALLATION TOOLS AND RECOMMENDATIONS

In order to install the plug properly, make a hole perpendicularly to the base support using the right drill bit. Before installing the plug make sure the hole is clean and all the drilling dust has been removed.

We recommend not to use an impact drill while making the hole on an hollow brick wall in order to prevent the internal bulkheads break.

Eventually, insert the anchor using a hammer.

PACKAGING

In cardboard box

DATA 09-2022 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it