


## FX Universal flange connection

### APPLICATION


Used to fasten pipe clamps on any kind of masonry.

### FEATURES AND BENEFITS

- > It enables pipe clamps installation **on any kind of surface**.
- > It can be fastened either **with screw and plug, or with structural adhesives**.
- > Thanks to the material it is made of - together with the sound-proof Flip pipe clamp - it allows to reduce vibrations, making the item **sound-proof**.
- > **It removes thermal bridges**.
- > It is **resistant to oxidation** and chemical agents.
- > **It stops galvanic streams**.

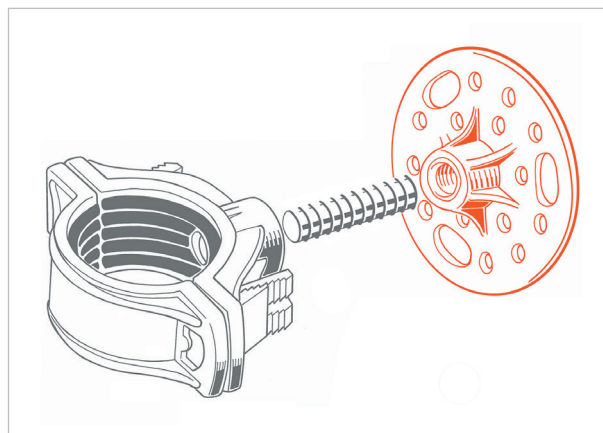

Flip  
system

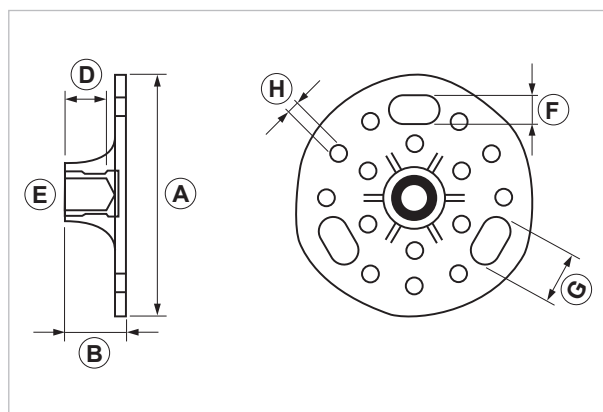

COD	TYPE	Connection	A	B	D	E	F	G	H
181050	FX 8	M8	70	18	12,5	M8	8,5	15	5
181055	FX 10	M10	70	18	12,5	M10	8,5	15	5

### RECOMMENDED LOADS

TYPE	Traction	Shear (100 mm distance from wall)
Forza (kN)	0,67	0,1

Data refer to ideal conditions on concrete using mechanical anchors (screws, washers and plugs).

Chemical anchors guarantee better performances than mechanical ones.  
Data in kN. 1 kN = 100 kg.

# FLIP® SYSTEM

## PIPE CLAMPS AND PIPE LINES FIXINGS

### MATERIAL TECHNICAL DATA

#### MATERIAL

Polyamide PA 6.6 stabilized against UV rays

#### AVAILABLE COLORS

Grey RAL 7035

#### INSERT

Brass CW614N EN 12164

#### PERFORMANCE UNDER FIRE SITUATIONS

“V2” class according to UL 94 regulation

#### BASE MATERIAL

Masonry - Plasterboard - Wood - Fiberglass walls - Sandwich walls - Insulated walls

### INSTALLATION

- > Mechanical anchoring
- > Chemical anchoring

### PACKAGING

In cardboard box

### RELATED ITEMS

- > FLIP System product range
- > Chemical and mechanical anchors

### DATA 09-2022 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to “Ethica Global Investments S.p.A.” management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – [www.gia.it](http://www.gia.it)