




G-CLIP Fixing kit

APPLICATION

It is used to fasten G-Clip pipe clamp on masonry.

FEATURES AND BENEFITS

- > **Quick and easy installation:** the plate is to be inserted into G-Clip pipe clamp, which is then assembled to double threaded screw. The screw can be inserted with a hammer.
- > Suitable for **any kind of masonry.**
- > The Giolli plug ensures **strength and stability** on every kind of masonry.

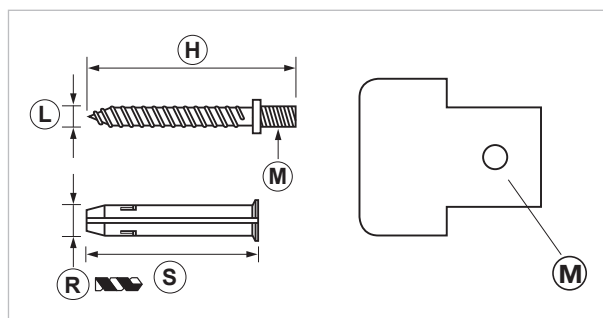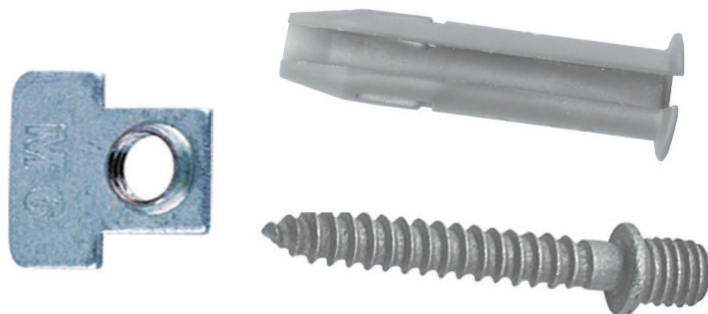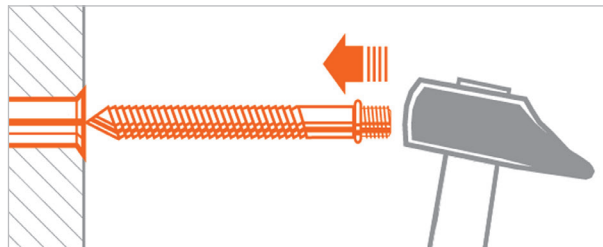

COD	TYPE	H	L	M	R	S
092090	KIT FISS. G-CLIP	41	4,3	M6	6	30

NYLON PIPE CLAMPS PIPE CLAMPS AND PIPE LINES FIXINGS

MATERIALS TECHNICAL DATA


PLATE AND SCREW

Steel 4.8 EN ISO 898.1 with electro zinc-plating 7-8 µm

PLUG

PP Polypropylene

RECOMMENDED LOADS

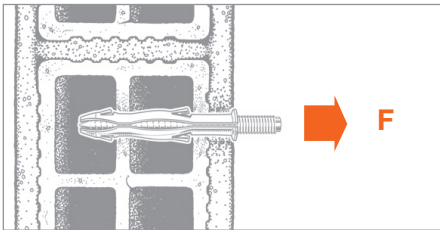

TYPE	F
KIT FISS. G-CLIP	22

Recommended load is the average resistance load with a safety coefficient.
Data are expressed in daN.
1daN=1kg.

INSTALLATION PROCESS



PACKAGING

In polyethylene bag

DATA 09-2022 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.
Gia S.p.A. reserves the right of changing technical features and molds without notice.
This company is subject to “Ethica Global Investments S.p.A.” management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it