


IP L Threaded plug for insulated walls

APPLICATION


Fixing for external insulated walls.

FEATURES AND BENEFITS


- > It guarantees thermal insulation.
- > Thanks to its sharp shape, no prior hole is needed on EPS and XPS panels.
- > It is made of **high quality nylon**, and it is resistant both to ageing and atmospheric agents.
- > Suitable even for **insulating panels made of wood fiber** (prior hole: 8 mm for IPL60 and 13 mm for IPL95).

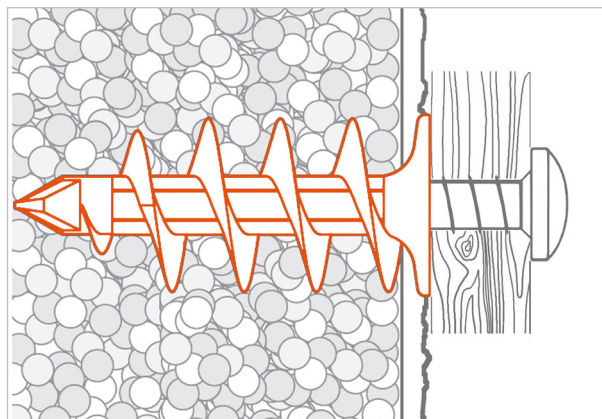

IPL 60

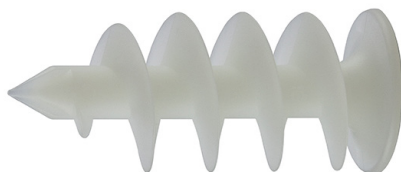

IPL 95

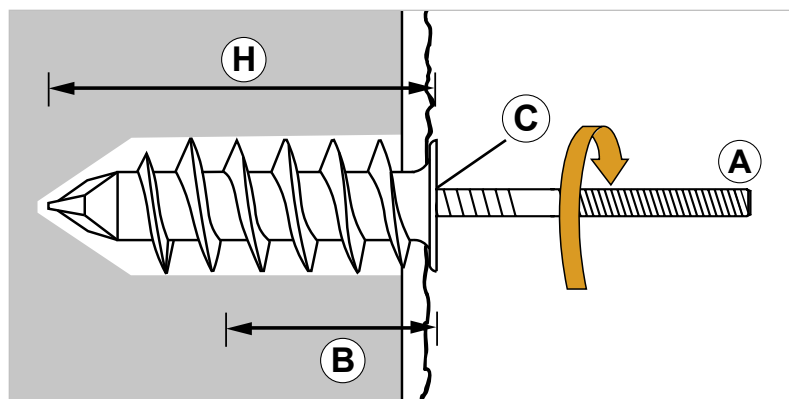

COD	TYPE	A	B	C	H
120310	IP L60	4,5-5	30	TX40	58
120320	IP L95	8 - M8	40	SW13	95

ANCHORS AND SEALANTS


ANCHORS FOR INSULATED WALLS

MATERIALS TECHNICAL DATA

ANCHOR
Nylon 6.0

BASE MATERIAL
EPS or XPS panels

RECOMMENDED LOADS

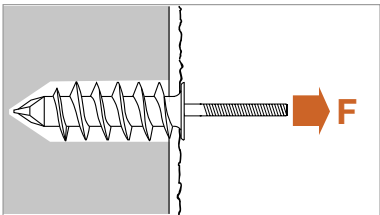


TYPE	EPS	XPS
IP L60	5	8
IP L95	9	14

Data refer to installations on EPS - XPS insulating panels.

Recommended load is the average resistance loads with a safety coefficient.
1daN=1kg.

INSTALLATION PROCESS

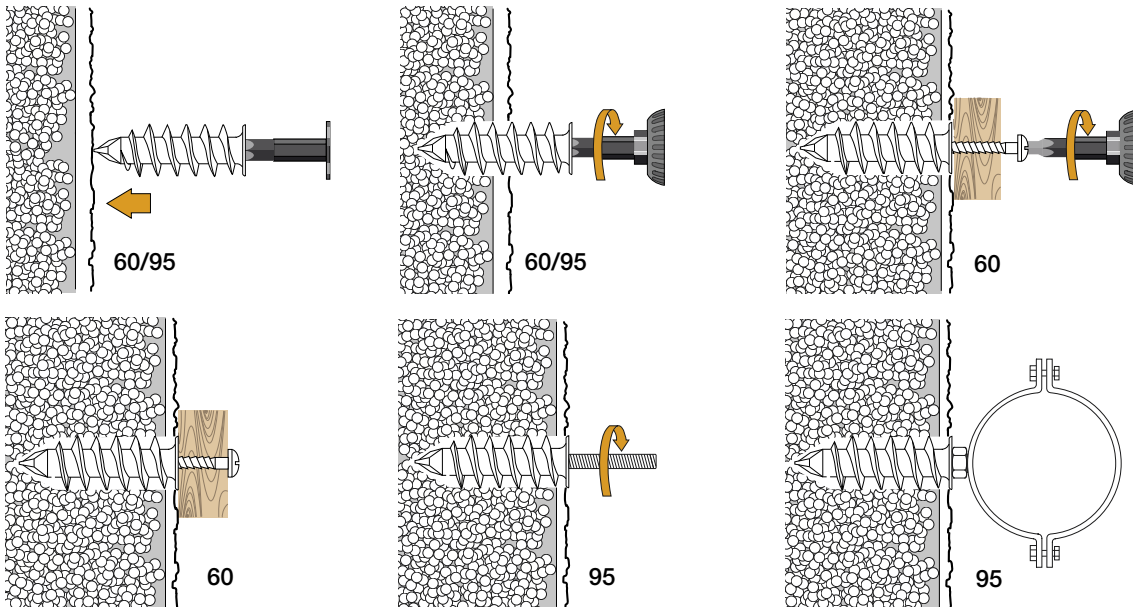

PACKAGING

In cardboard box

RELATED ITEMS

- > CR - Copper pipe clamp
- > VLM screw
- > Gicollar - Hinged copper pipe clamp
- > Giprofil - Copper channel
- > PR - pipe clamp

DATE 06-2023 REV. 02

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.
Gia S.p.A. reserves the right of changing technical features and molds without notice.
This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it