ANCHORS AND SEALANTS

ANCHORS FOR INSULATED WALLS




APPLICATION


Fixing for external insulated walls.

FEATURES AND BENEFITS

- > Complete set made of plug, finishing washer, threaded rod and A2 stainless steel M8 nut.
- > It guarantees thermal insulation.
- > Thanks to its wedge-shaped design, no prior hole is needed on EPS and XPS panels. The item has to be installed using a screwer and an SW17 hexagonal socket. The hole created by the socket in the insulating panel makes washer's insertion easier.
- > The technopolymer plug is resistant both to ageing and atmospheric agents.

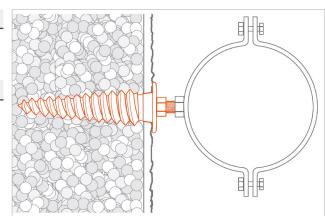



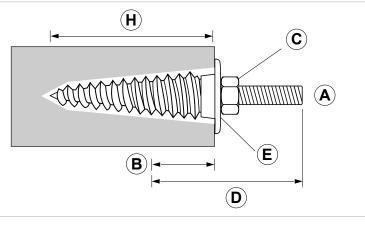

COD	ТҮРЕ	Α	В	с	D	E	н
120350	IP M8	8 - M8	35	SW17/TX55	70	40	95



ANCHORS AND SEALANTS

ANCHORS FOR INSULATED WALLS

MATERIALS TECHNICAL DATA

PLUG

PE Polyethylene

SCREW AND NUT

Stainless steel AISI 304-A2


COVERING WASHER

PP Polypropylene

BASE MATERIALS

EPS or XPS panels


RECOMMENDED LOADS

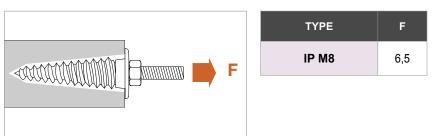

Data refer to installations on EPS - XPS insulating panels.

Recommended load is the average resistance loads with a safety coefficient. 1daN=1kg.

INSTALLATION PROCESS

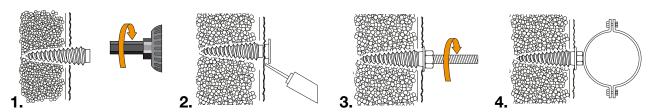

INSTALLATION TOOLS AND RECOMMENDATIONS

SW17 Hexagonal socket

PACKAGING

In polyethylene bags

RELATED ITEMS

> PR pipe clamp

> VLM screw

DATE 06-2023 REV. 02

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation. Gia S.p.A. reserves the right of changing technical features and molds without notice. This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. - Via Sac. A. Cremona, 12 - 28069 Trecate (NO) - www.gia.it

