MensolaPiù
Cast iron and tubular radiator "Più" telescopic bracket

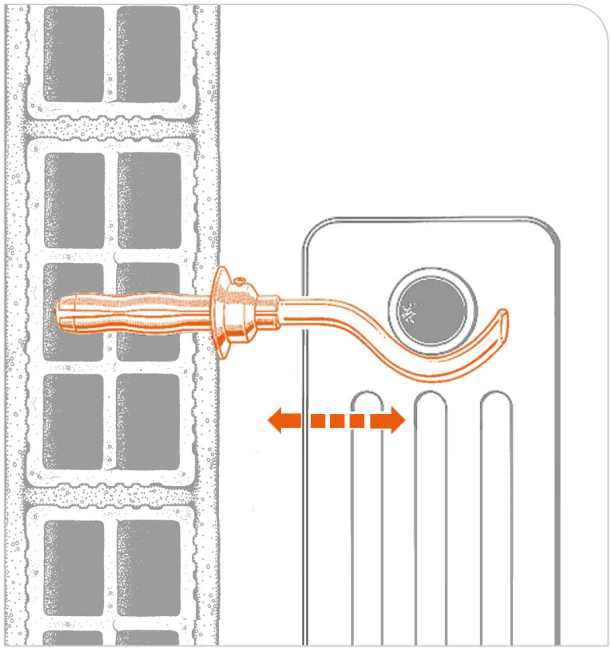

APPLICATION

Cast iron and tubular radiators fastening

FEATURES AND BENEFITS

> The **best aesthetic result** is guaranteed by the **handmade bevelled tip.**
> **Pinpoint adjustment** of radiator's distance from the wall and of the radiator's level is guaranteed by the **cam washers** that are included in the package.
> **The appealing packaging** of transparent blister packs make this product particularly suitable to self-service distribution.

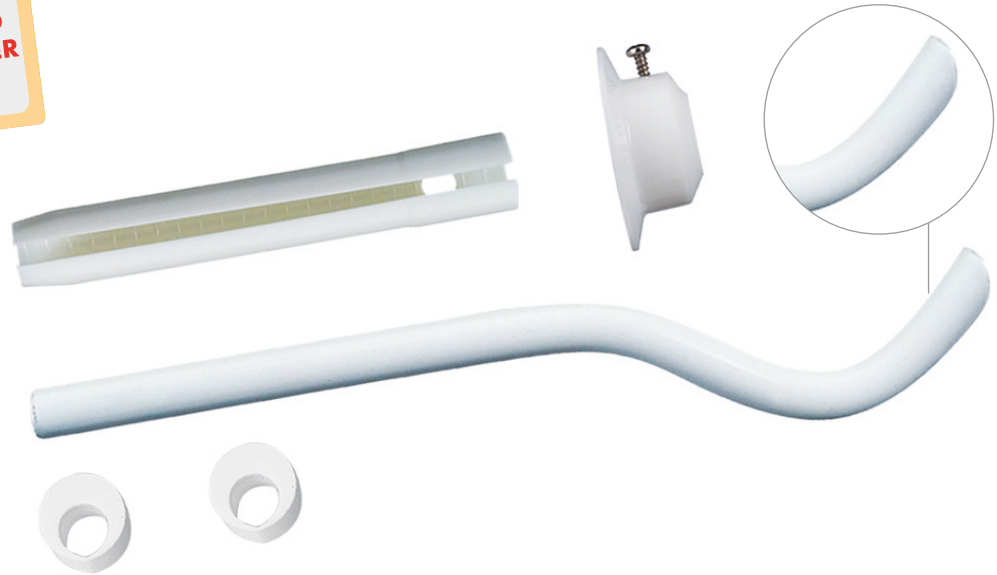

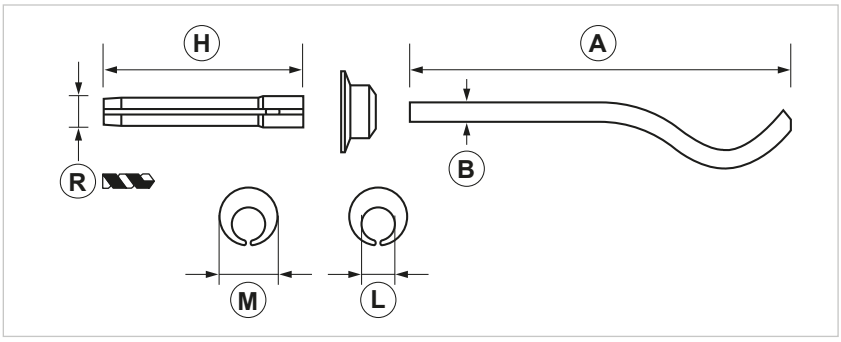

COD	TYPE	Application	Finishing	A	B	H	L	M	R
310001	**L più**	5 - 6 columns	white painted	253	12	111	11,5	18	15
311001	**M più**	4 columns	white painted	222	12	111	11,5	18	15
312001	**C più**	3 columns	white painted	201	12	111	11,5	18	15

RADIATORS' FIXINGS
"PIÙ" TELESCOPIC BRACKETS

MATERIAL TECHNICAL DATA

BRACKET

Carbon steel S235JR - EN10027

PLUG, COVER WASHER AND CAM WASHERS

PE White Polyethylene

BASE MATERIAL

Masonry | Plastered hollow brick | Concrete

RECOMMENDED LOADS



	A	F	P
L	170	3,5	40
M	150	3,5	70
C	126	3,5	100

Recommended loads refer to the single bracket. The payload defines the metal bracket capacity, not the wall one.
Recommended load is the average resistance loads with a safety coefficient.
1daN=1 kg.

INSTALLATION

In order to properly install the plug, make a hole perpendicularly to the base support using the right drill bit. Before applying the plug, the hole must be cleaned up and the drilling dust removed. We recommend not to use an impact drill to make the hole on an hollow bricks wall in order to prevent internal bulkheads breakage. Insert the plug and then the bracket by using a hammer. Add the cover washer and adjust the bracket.
Fix the bracket by screwing the screw set in the washer.
Eventually, install the radiator checking it is properly adjusted.

INSTALLATION TOOLS AND RECOMMENDATIONS

Drill with appropriate drill bit.
Do not use impact drill in order to prevent internal bulkheads breakage.

PACKAGING

Pair of brackets | In blister pack

RELATED ITEMS

> Universal jig for radiator connections
> Spare plug for radiator brackets

DATA 03-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.
Gia S.p.A. reserves the right of changing techical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it