
# **EPDM** insulating sheath


# **APPLICATION**


Thermal and acoustic insulation within pipe and pipe clamp.


# **FEATURES AND BENEFITS**


- > It guarantees high performances in thermal insulation.
- > It reduces the noise that might be produced by the fluid flowing in the pipe.
- > The **different designs** of the sheath satisfy the installation needs of the main pipe clamps on the market.
- > It is made of **black EPDM** to guarantee high performances.

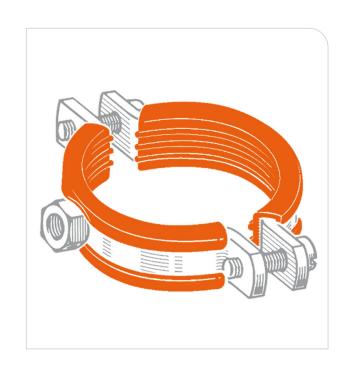










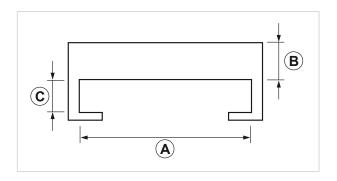

COD	ТҮРЕ	Α	В	С
166000	PG 4	20,5	4	3
166040	PG 6	40	6	5
166050	PG 7	30	7	3
166200	PG 8	20	8	3,5





#### MATERIALS TECHNICAL DATA

#### **MATERIAL**

Black EPDM - Halogen free

#### **TEMPERATURE**

-30°C / +125°C

#### **HARDNESS**

55° +/- 5° Shore A

#### THERMAL CONDUCTIVITY


0,3 W/Km

#### FIRE RESISTANCE

"E" EN 13501

#### **TECHNICAL FEATURES**









The cylinders favour the slight dilation of the pipe while absorbing small vibrations, and ensuring - at the same time - grip on the pipe clamp, and noise reduction.

# **PACKAGING**

In cardboard box I 20 items

# **RELATED ITEMS**

- > Silicone insulating sheath
- > Light duty pipe clamp with M/F adapter
- > Heavy duty pipe clamp

### DATE 07-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation. Gia S.p.A. reserves the right of changing techical features and molds without notice.

Gia S.p.A. - Via Sac. A. Cremona, 12 - 28069 Trecate (NO) - www.gia.it

