


PG S Silicone insulating sheath

APPLICATION

It ensures thermal and acoustic insulation between pipe clamp and pipe line.

FEATURES AND BENEFITS



- > When inserted between pipe clamp and pipe line, it provides a **thermal insulation up to 200°C**.
- > **It reduces the noise** that might be produced by the fluid flowing into the pipe line.

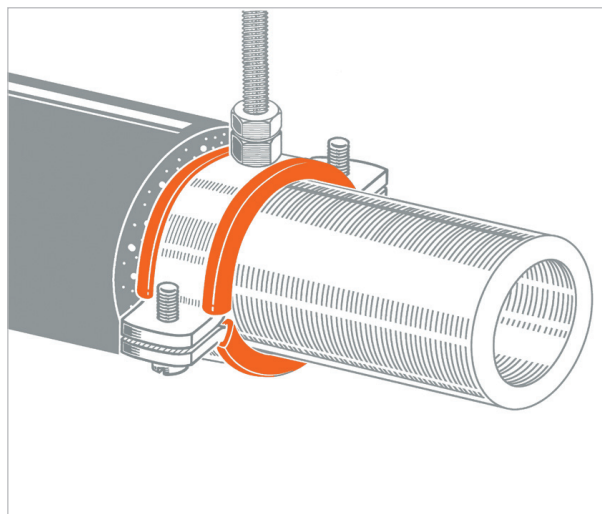

PG4S



PG7S

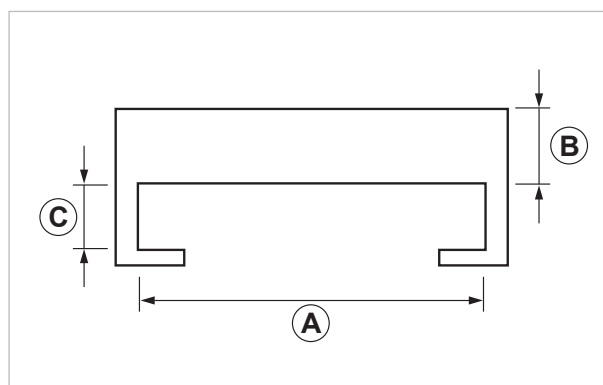

| COD | TYPE | A | B | C |
|--------|-------|------|---|---|
| 166001 | PG 4S | 20,5 | 4 | 3 |
| 166051 | PG 7S | 30 | 7 | 3 |

PIPE CLAMPS' ACCESSORIES

PIPE CLAMPS AND PIPE LINES FIXINGS

MATERIALS TECHNICAL DATA

SHEATH

Halogen-free red silicone

TEMPERATURE

-60°C / +200°C

HARDNESS

50° +/- 5° Shore A


CONDUCTIVITY

0,3 W/Km

FIRE RESISTANCE

"E" EN 13501

TECHNICAL FEATURES

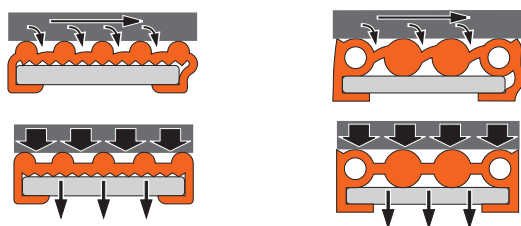

The cylinders favor the slight dilation of the pipe while absorbing small vibrations, and ensuring - at the same time - grip on the pipe clamp, and noise reduction.

PACKAGING

In cardboard box - 10 items

RELATED ITEMS

- > PG - EPDM insulating sheath
- > Light duty pipe clamps with M/F adapter
- > Heavy duty pipe clamps

DATA 09-2022 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it