





## Reticulated sleeve

### APPLICATION

Chemical anchor fixing on hollow brick walls.

### FEATURES AND BENEFITS

- > The net structure of the sleeve guarantees the **perfect installation** of the chemical anchor.
- > Insert the threaded rod into the reticulated sleeve by spining it.

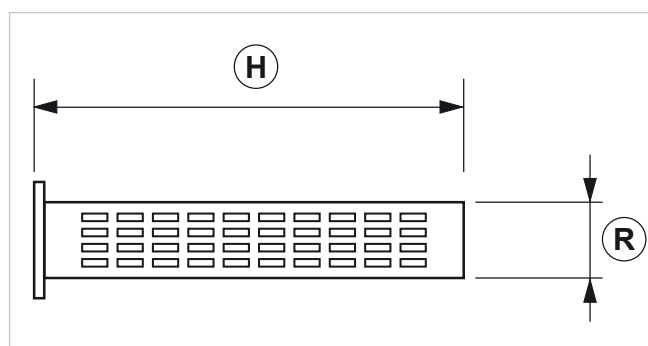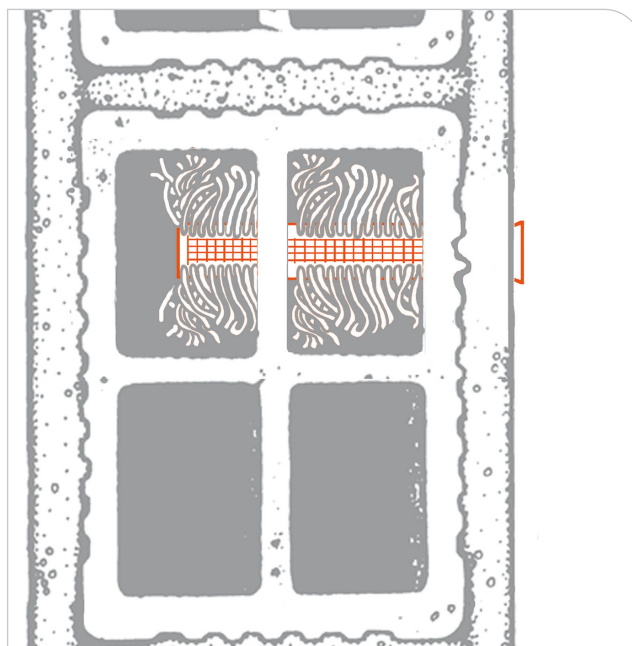

COD	TYPE	For rods Ø mm	H	R
155065	R 12X80	M6 - M8	80	12
155067	R 15X85	M8 - M10	85	15
155069	R 20X85	M12	85	20



### MATERIALS TECHNICAL DATA

#### MATERIAL

PE Polyethylene

#### BASE MATERIAL

Masonry | Concrete

#### NUMBER OF INSTALLATIONS

TYPE	Hollow brick			Solid brick		
	M8	M10	M12	M8	M10	M12
<b>TCH P300</b>	±27	±16	±9	±56	±40	±29
<b>TCH P165</b>	±15	±9	±5	±31	±22	±16

#### PACKAGING

In cardboard box

#### RELATED ITEMS

- > TCH PE 300 / 165 - Professional styrene free chemical anchor
- > Hook
- > Threaded rod for chemical anchor

#### DATA 09-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation. Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – [www.gia.it](http://www.gia.it)

T 05.28.143 REV 0

