






RDA S Insulated support hanger

APPLICATION

Insulated fixing with the chance to adjust hanging support's height up to M10.

FEATURES AND BENEFITS

- > The black EPDM components ensure **thermal insulation** between the support and the fixing items, and they guarantee the **reduction of noise spread**. They can be used with temperatures included between -30°C and +115°C.
- > The product is provided **already assembled**.

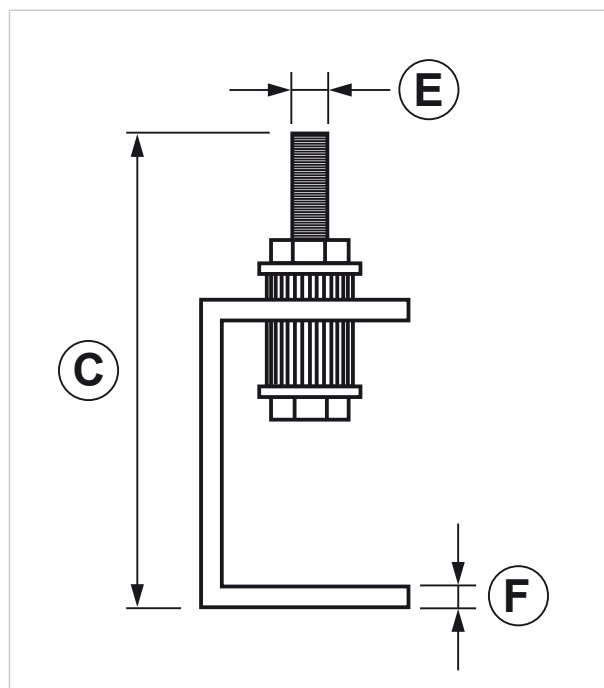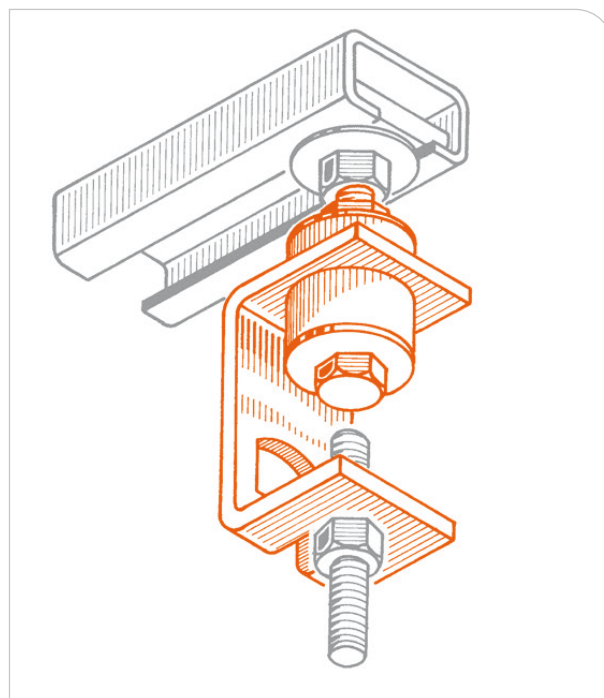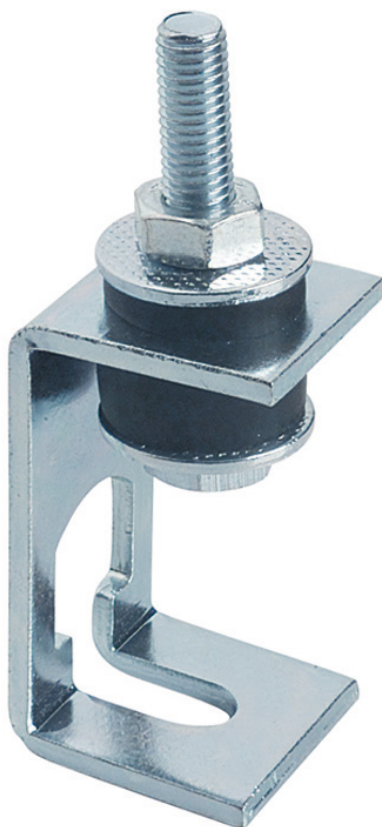

COD	TYPE	C	F	E
161710	RDA S	105	4	M10


MATERIALS TECHNICAL DATA
MATERIAL

Steel DD11 EN 10111 with electro zinc plating 7-8 µm

INSULATION


Black EPDM rubber

TEMPERATURE

-30°C / +115°C

HARDNESS

55° +/-5 Shore A

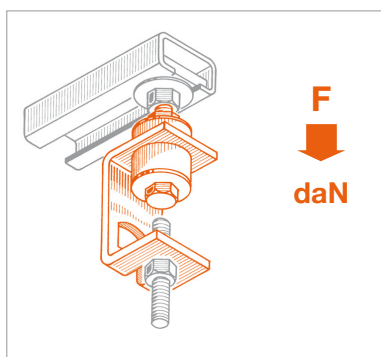RECOMMENDED LOADS


TYPE	F
RDA	100
RDA S	60

Recommended load is the average resistance loads with a safety coefficient.
Data provided in daN. 1daN=1kg.

PACKAGING

In cardboard box

RELATED ITEMS

- > Universal swivel hanger - SSU
- > Support hanger - RDA
- > Threaded rod

DATE 07-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.
Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it

T 04.22.116 REV 0

