

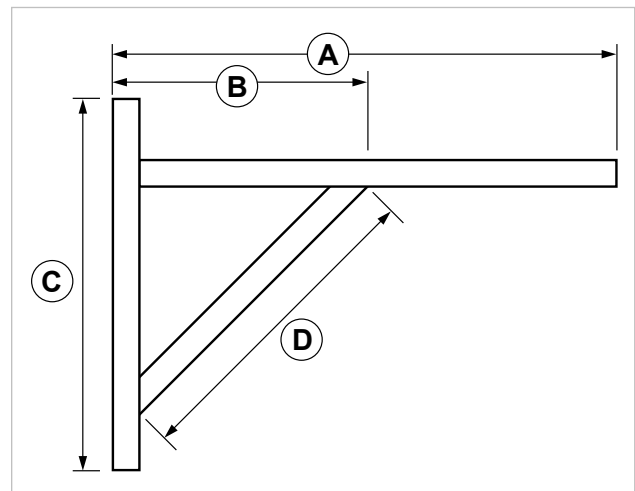
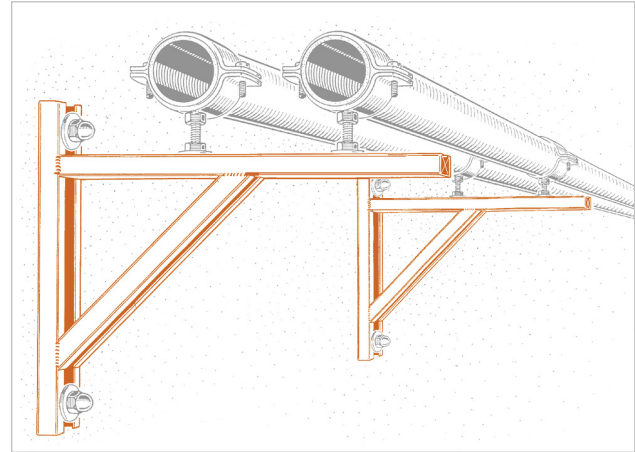
SAT - SAT1 Grip angle bracket

APPLICATION

Used to fasten pipe lines on the wall.

FEATURES AND BENEFITS

- > The **patented knurling** applied to the rail sides - both inside and outside - prevents connection parts from sliding.
- > Provided with **23x10,5mm (12,5) loops** and 35mm centre to centre distance.
- > It is made of **PF1 Grip strut channel**.



COD	TYPE	Finishing	Strut channel	A	B	C	D
161255	SAT GRIP	Galvanized	PF1 Grip	370	190	280	250
161265	SAT 1 GRIP	Galvanized	PF1 Grip	545	270	385	380

GRIP LIGHT DUTY FIXING SYSTEM






SUPPORTING BRACKETS

MATERIALS TECHNICAL DATA

BRACKET

Steel DD11 EN 10111 with electro zinc plating 7-8 μm

RECOMMENDED LOADS

TYPE	 F1 = daN	 F1 = daN	 F2 = daN	 F3 = daN	 Q = daN
SAT GRIP	250	70	125	85	200
SAT 1 GRIP	200	40	90	55	130

F = concentrated load in daN. - **Q** = uniform load in daN.

Admissible tension 140 N/mm². - Admissible deflection L/125.

For wall fastening please consider the supporting performance of the plug or the connection piece.

PACKAGING

In cardboard box

RELATED ITEMS

- > Pipe clamps
- > BF - Threaded rod

DATE 06-2023 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it