



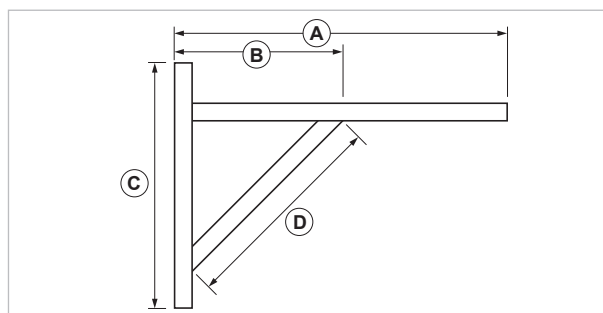
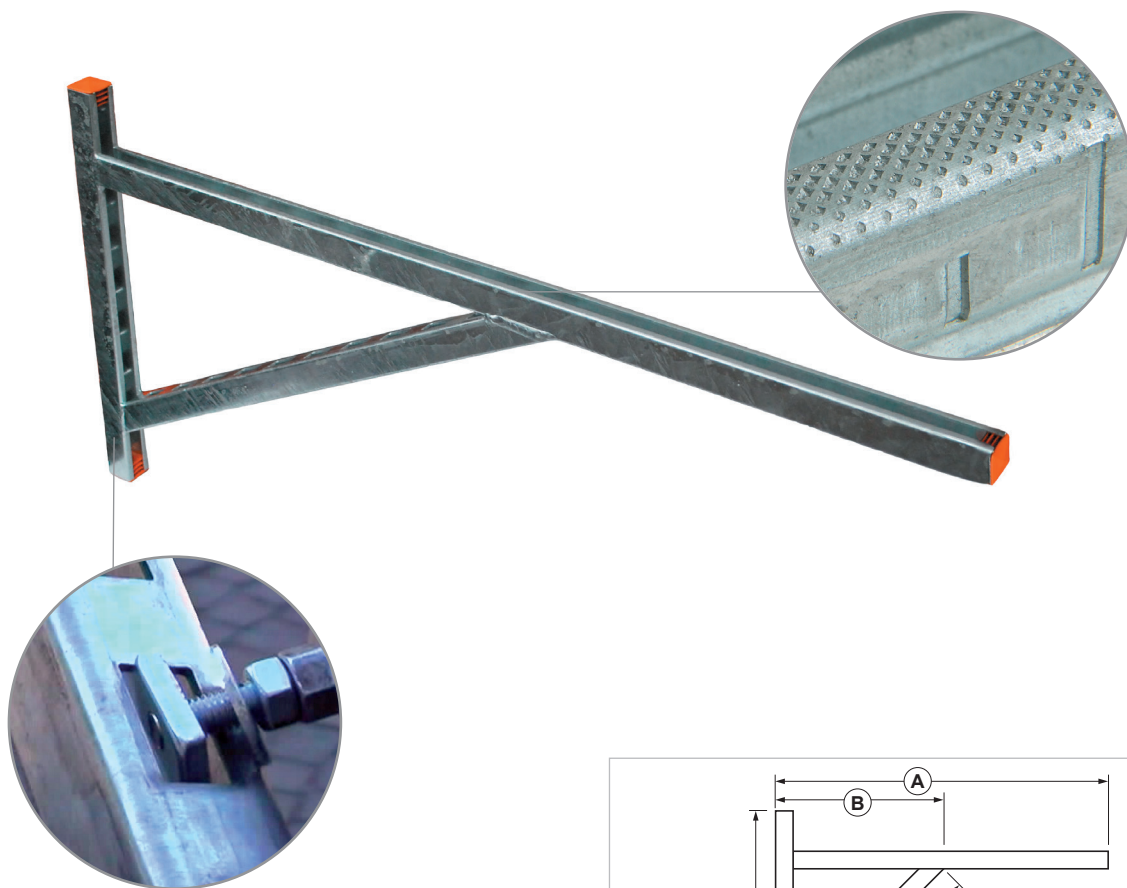
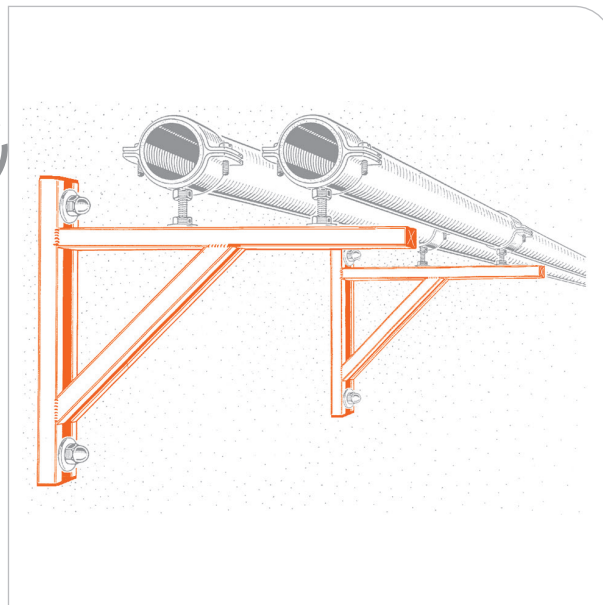
## SAT2 GRIP GRIP long angle bracket

### APPLICATION

Used to fasten pipe lines and devices on the wall.

### FEATURES AND BENEFITS

- > the **patented knurling** applied to the rail sides - both inside and outside - prevents connection parts from sliding.
- > Thanks to its **28x15 mm rectangular loops** and the 50mm centre to centre distance, it is possible to insert connection items even during installation.
- > It is made of **PF2 grip strut channel** and complete with **3 closing caps**.



COD	TYPE	Finishing	Strut channel	A	B	C	D
161270	SAT2 GRIP	Zinc plated	PF2 grip	880	510	450	580







**MATERIALS TECHNICAL DATA**
**MATERIAL**

Steel DD11 EN 10111 with electro zinc plating 7-8 µm

**CAPS**

PE Polyethylene

**RECOMMENDED LOADS**

TYPE	 F1 = daN	 F1 = daN	 F2 = daN	 F3 = daN	 Q = daN
<b>SAT2 GRIP</b>	250	50	125	85	200

**F** = concentrated load in daN. - **Q** = uniform load in daN.

Admissible tension 140 N/mm<sup>2</sup>. - Admissible deflection L/125.

For wall fastening please consider the plug's or the connection's supporting performance. Values expressed in daN.

**PACKAGING**

In cardboard box

**RELATED ITEMS**

- > Threaded rods
- > Pipe clamps

**DATE 09-2021 REV. 00**

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – [www.gia.it](http://www.gia.it)