



STRIP

Perforated strip






APPLICATION

The strip is shaped in order to fix water joints with flange angle pipes or pipe lines in general.

FEATURES AND BENEFITS

- > Perforated strip with **sendzimir zinc plating** to prevent oxidation.
- > Versatile and handy, **it can be easily shaped and cut manually** or by using a specific item, the so called "UTS".
- > The **patented drilling layout** makes the strip easy to cut and it also guarantees the possibility to fasten a wide range of junctions.

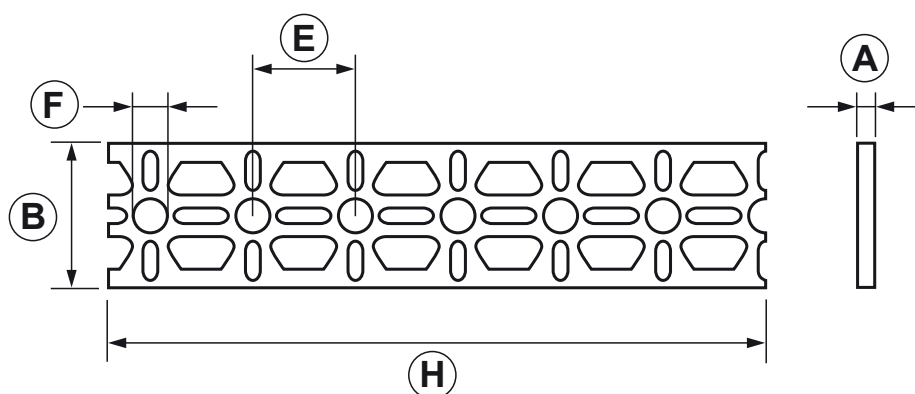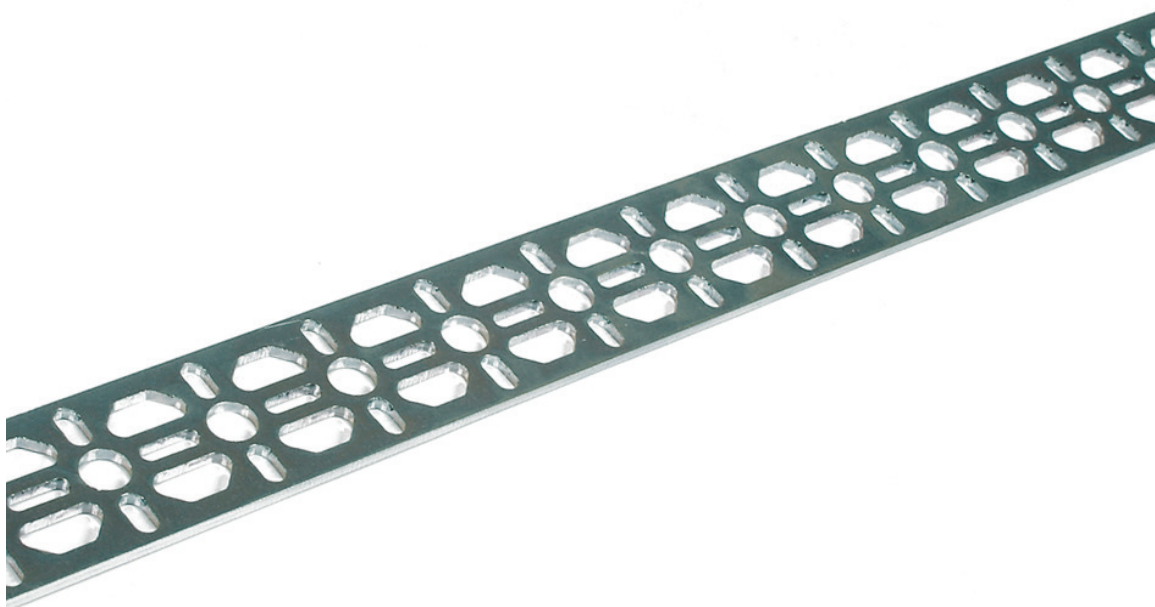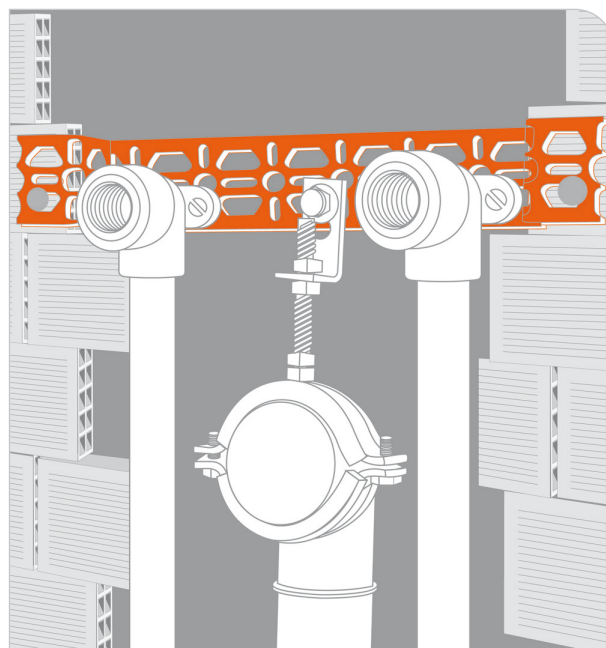

COD	TYPE	A	B	E	F	H
074000	STRIP	3	40	30	10,5	1980









MATERIALS TECHNICAL DATA

MATERIAL

Steel DX 51 D EN 10142 with sendzimir zinc plating Z200

WEIGHT

0,5 kg/m



INSTALLATION TOOLS AND RECOMMENDATIONS

Use "UTS" tool to make cut and folding easier.

PACKAGING

Provided in rods 1,98 mt long.

RELATED ITEMS

- > Drainage fixing support - ASC
- > Back plate for flange angle pipes - PIASTRINA
- > Fixing screw for flange angle pipes
- > Strip bending tool - UTS

DATE 07-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it

T 04.21.105 REV 0

