



SUV 2



Expansion vessels bracket with brass connection

APPLICATION

Used to fasten and install expansion vessels for solar panels and sanitary water.

FEATURES AND BENEFITS

- > Bracket complete with $\frac{3}{4}$ " **brass joint - compliant with DM 174 certificate** - for sanitary water distribution.
- > **Strong**, with high load capacity: It can support vessels up to 50 litres (F = 60 kg).
- > **Telescopic**: the distance from the wall can be adjusted from 160mm up to 220mm.
- > **Universal**: it is suitable for any kind of expansion vessels.

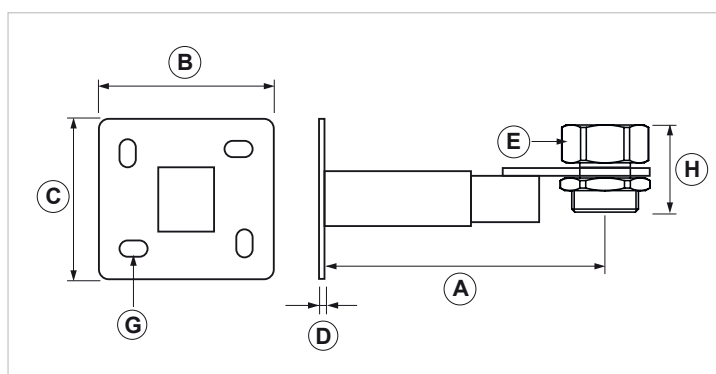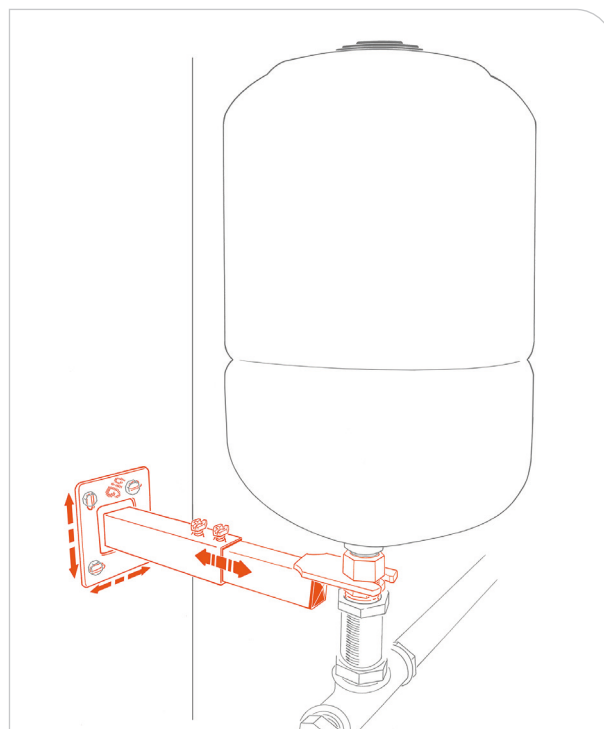

COD	TYPE	Application	A	B	C	D	E	G	H
075525	SUV 2	Solar panels and ACS	160-220	95	87	3	G 3/4" F-M	9x15	34,5



MATERIALS TECHNICAL DATA

MATERIAL

Steel DD11 EN 10111 with electro zinc plating 7-8 µm


VALVE

Brass CW 614N - UNI EN 12164 with DM 174 certificate

SCREWS

Screw 4.8 EN ISO 898.1 with electro zinc plating 7-8 µm - Lag screw with combined shear

RECOMMENDED LOADS

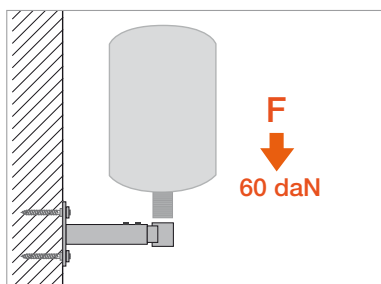

TYPE	F
SUV 2	60

Recommended load is the average resistance loads with a safety coefficient.
1daN=1kg.

INSTALLATION

Easier vessel's installation:

1. Fix the plate to the wall
2. Fix the sleeve on the fork-shaped telescopic arm.
3. Fix the vessel on the fork-shaped telescopic arm.
4. Insert the telescopic arm and pinpoint adjust.

PACKAGING

In bags | 1 item complete with accessories

RELATED ITEMS

> Giolli plug 10TB, TCO, TLA, TBF

DATE 07-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it

T 04.25.118 REV 0

