



giolli® AND TB SCREW

APPLICATION

Used to fasten object with a narrow thickness, but which need a strong fixing as well.

FEATURES AND BENEFITS

- > **Hex head screw** with washer.
- > The Giolli plug guarantees a **strong grip** in hollow bricks and solid materials, either porous or friable.
- > It is available in **transparent blisters** for self-service distribution.

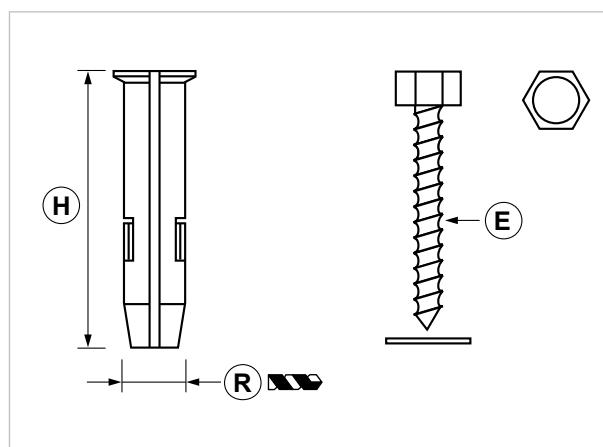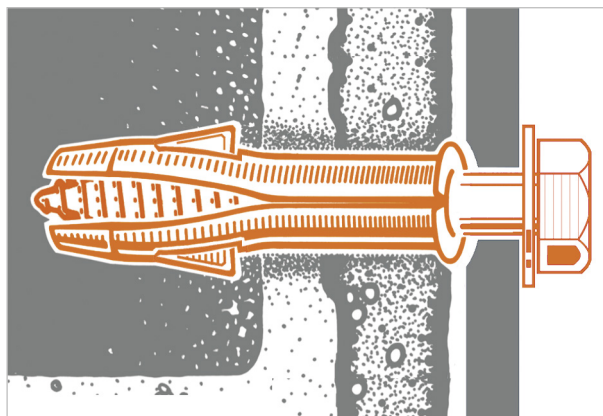

COD	TYPE	E	H	R	Notes
138700	8 TB	6x38	40	8	
142700	10 TB	8x80	70	10	
146700	12 TB	10x82	70	12	
338700	8 TBs	6x38	40	8	*
338710	8 TBXs	6x50	40	8	*
342700	10 TBs	8x80	70	10	*
346700	12 TBs	10x82	70	12	*



*Packaged in transparent blisters.

ANCHORS AND SEALANTS

GIOLLI ANCHORS

MATERIALS TECHNICAL DATA

PLUG

PP Polypropylene

TB SCREW

Zinc-plated steel UNI 704 / DIN 571

TBX SCREW

Stainless steel AISI 301 - EN 10088

BASE MATERIAL

Solid masonry - Aerated cellular concrete (Gasbeton) - Hollow brick walls - Cement - Prestressed concrete

INSTALLATION

In order to install the plug properly make a hole perpendicularly to the base support using the right drill bit. Before applying the plug make sure the hole is completely clean and all drilling dust has been removed. We recommend not to use an impact drill while making the hole on an hollow brick wall in order to prevent the internal bulkheads break. Insert the plug and make the required installation.

INSTALLATION TOOLS AND RECOMMENDATIONS

Drill with proper drill bit.
Do not use the impact drill to prevent breaking the internal bulkhead of the brick.

PACKAGING

In cardboard box or transparent blisters

DATE 07-2023 REV. 03

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it