Flushing cistern kit for plasteboard walls

APPLICATION

Flushing cisterns fastening on drywall.

FEATURES AND BENEFITS

> **Zinc plated fixing structure** - compliant with EN10143 and EN10346 regulations - that can be adjusted during installation. It is designed to support flushing cisterns - 80 mm wide - on plasterboard walls.

> The forks are to be fixed to the crossbeam of the wc support frame with the preassembled locking nuts. Forks can be fixed either on wall hung wc frame bracket - **"TDW" (cod. 020700)** - or universal crossbeam for wc floor fastening - **"TDWP" (cod. 020705)**.

> Once the horizontal crossbeam must be fixed on the wall's pillars at the right height, the upper part of the cistern can be fastened using its specific holes.

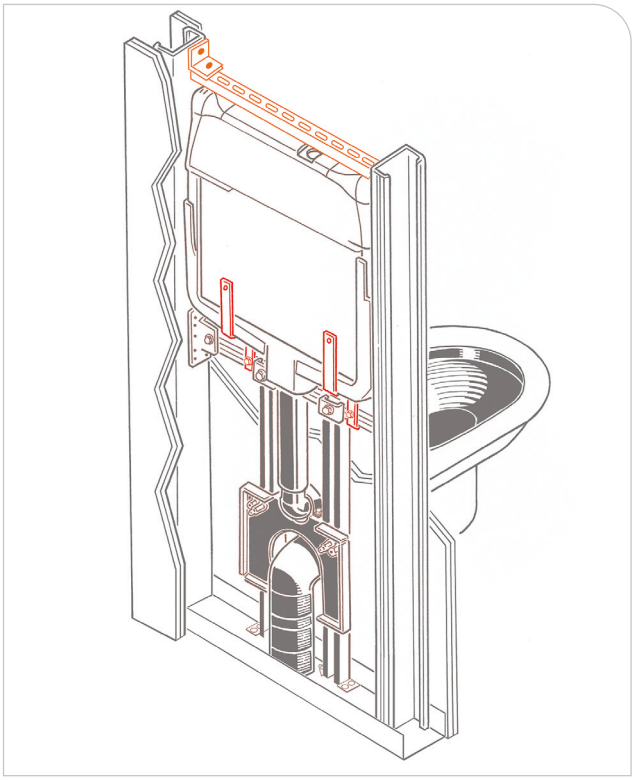

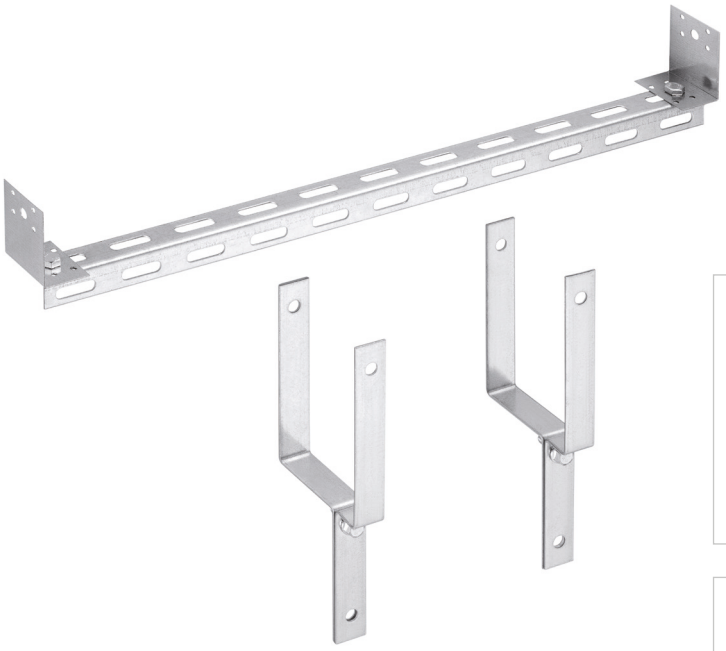

Kit composed of:
- 2 supporting forks WC flushing cisterns (for size 80 mm)
- 1 perforated crossbeam with preassembled flanges to fix the cistern to the crossbeam
- 1 data sheet with installatioon instructions

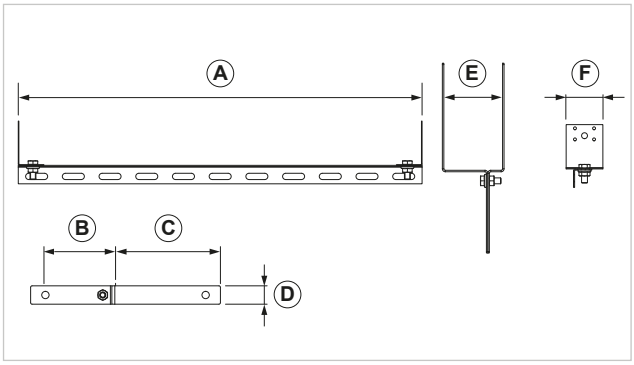

COD	TYPE	A	B	C	D	E	F
020730	TDC	530/550	95	140	25	80	47

SANITARY FIXINGS FOR PLASTERBOARD WALLS

MATERIALS TECHNICAL DATA

FRAME

Zinc plated steel DX51D+Z100 MAC - EN 10143, EN 10346

COMPONENTS

Steel 4.8 EN ISO 898.1 with electro zinc-plating 7-8 µm

BASE MATERIAL

Plasterboard

INSTALLATION

In order to properly install the item, please follow the instructions included included in the package.
Combine the frame with “TDT” fixing kit (cod. 020731-universal supporting crossbeam for plasterboard) to install flushing cisterns with floor fastened wc.
Thanks to this item it is possible to install the flushing cistern at the desired height.
Thanks to the preassembled nuts it is possible to fix the forks to support and install the flushing cistern.

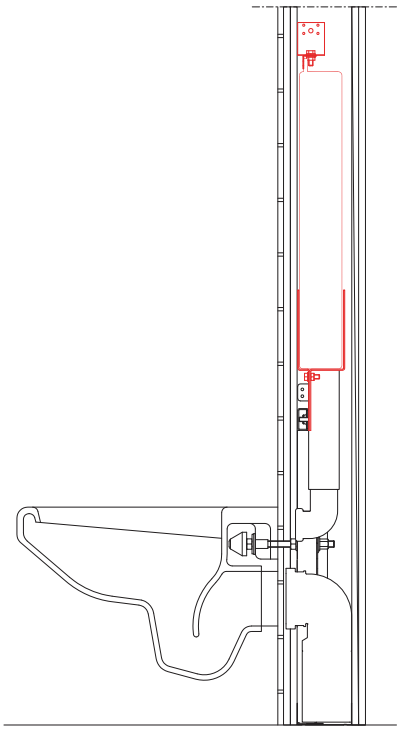

PACKAGING

In cardboard box

RELATED ITEMS

> Plasterboard product range
> TDW - Bracket frame foor wall hung WC

DATE 04-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.
Gia S.p.A. reserves the right of changing techical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it