






Turnbuckle

APPLICATION

Used to connect and adjust chains and other supports.
Used for hanging installations.

FEATURES AND BENEFITS


- > Complete with two open hooks. It allows to pinpoint adjust the lenght and the tension of the chain.

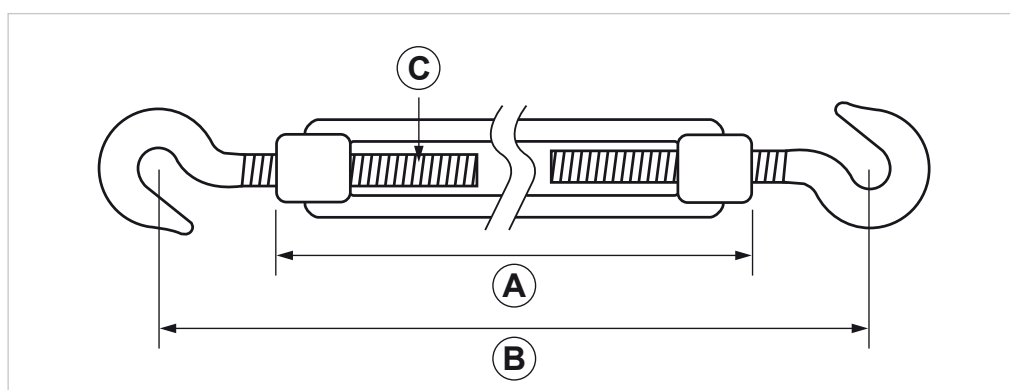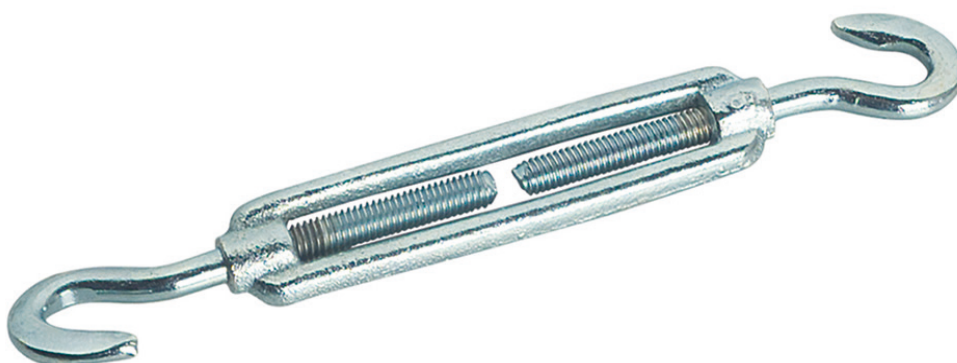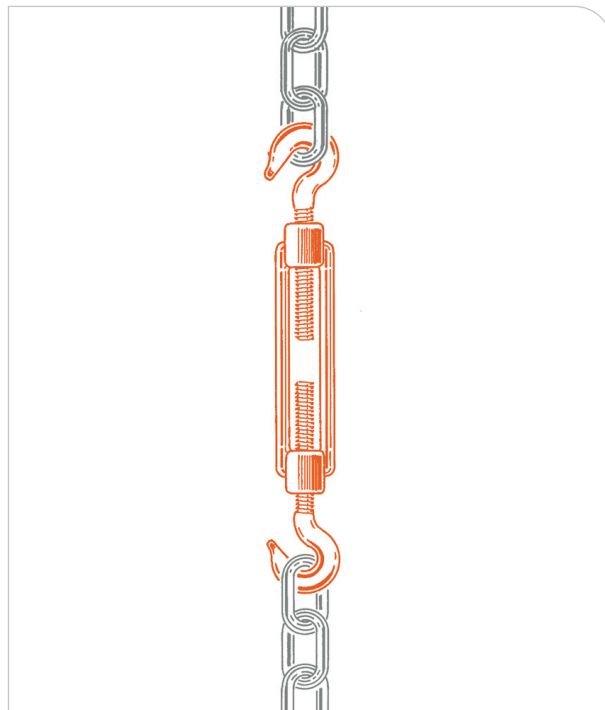

COD	TYPE	A	B	C
272060	TEN 6	89	130-180	M6


MATERIALS TECHNICAL DATA
MATERIAL

Steel 4.8 EN ISO 898-1 with electro zinc plating 7-8 µm

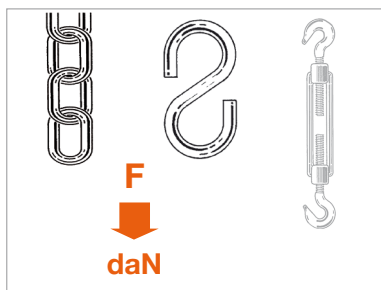RECOMMENDED LOADS


TYPE	F
CAT 2	67,5
CAT 3	100
GA 5	30
TEN 6	45

Recommended load is the average resistance loads with a safety coefficient.
1 daN=1kg.

PACKAGING

In cardboard box

RELATED ITEMS

> Chain - CAT

DATE 07-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it

T 04.22.122 REV 0

