



## TF screw and giolli®






### APPLICATION

Used to fasten object that must be placed far apart from the wall or the ceiling. Suitable for light duty fixings.

### FEATURES AND BENEFITS

- > Metric-wood thread double end screw, complete with nuts and washers.
- > The Giolli plug guarantees a **strong grip** in hollow bricks and solid materials, either porous or friable.

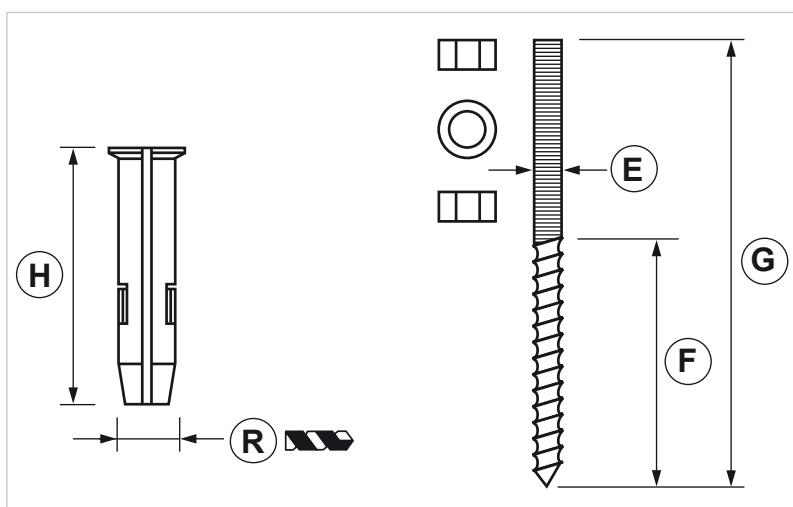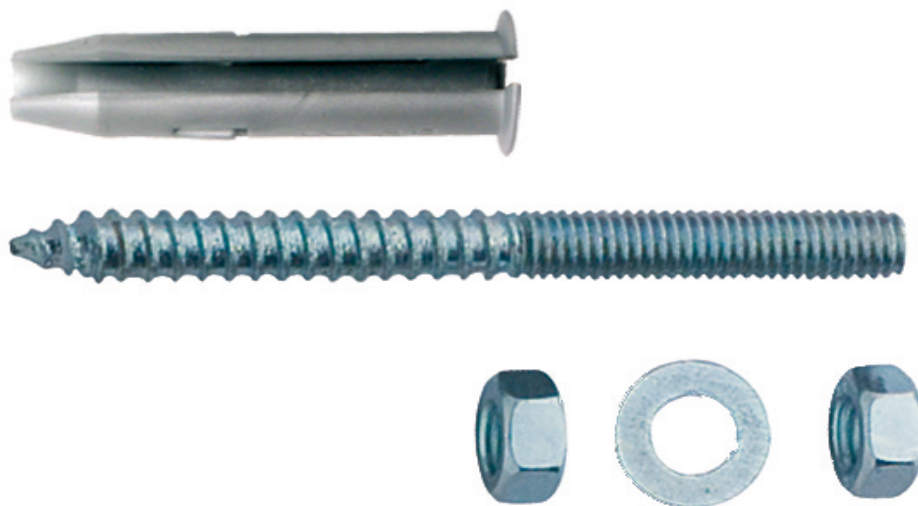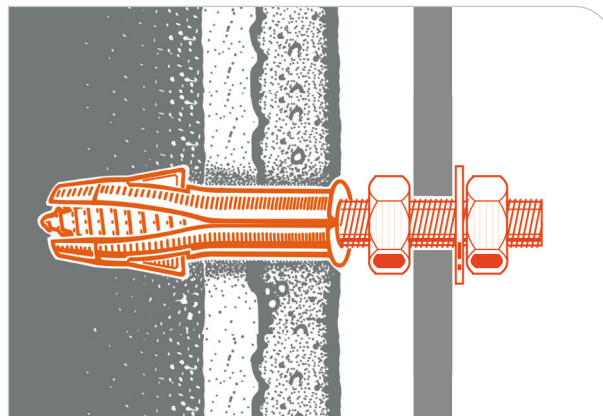

COD	TYPE	E	F	G	H	R
134500	6 TF	M4	25	50	30	6
138500	8 TF	M6	40	70	40	8



## ANCHORS AND SEALANTS

### GIOLLI PLUGS WITH SCREWS

#### MATERIALS TECHNICAL DATA

##### PLUG

PP Polypropylene

##### SCREW

Steel 4.8 EN ISO 898-1 with electro zinc plating 7-8 µm and heat treatment

##### BASE MATERIAL

Solid masonry | Aerated cellular concrete (Gasbeton) | Hollow brick walls | Cement | Prestressed concrete

#### INSTALLATION

In order to install the plug properly make a hole perpendicularly to the base support using the right drill bit. Before applying the plug make sure the hole is completely clean and all drilling dust has been removed. We recommend not to use an impact drill while making the hole on an hollow brick wall in order to prevent the internal bulkheads break. Insert the plug and make the required installation.

#### INSTALLATION TOOLS AND RECOMMENDATIONS

Drill with proper drill bit.

Do not use the impact drill to prevent breaking the internal bulkhead of the brick.

#### PACKAGING

In cardboard box | In transparent blister

#### DATA 09-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation. Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – [www.gia.it](http://www.gia.it)

T 05.30.150 REV 0

