



TG hook and giolli®






APPLICATION

Used to fasten water heater and pieces of furniture.

FEATURES AND BENEFITS

- > Hook screw.
- > The Giolli plug guarantees a **strong grip** in hollow bricks and solid materials, either porous or friable.
- > It is available in **transparent blisters** for self-service distribution.

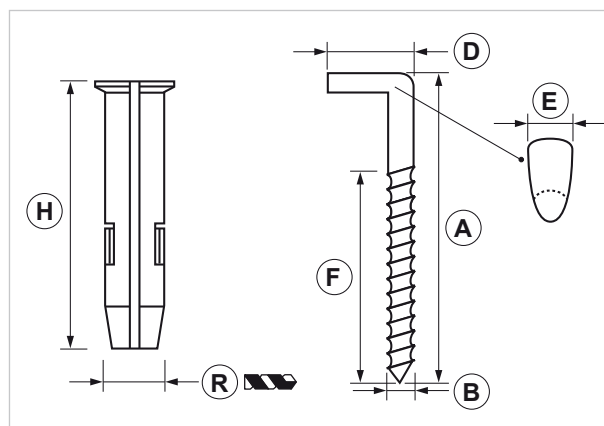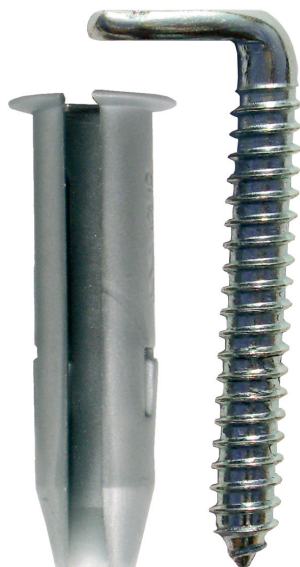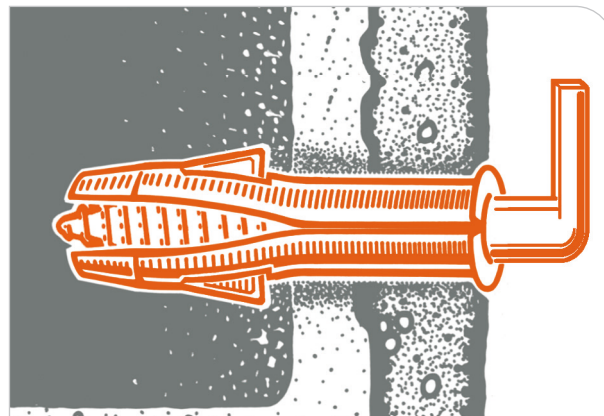

COD	TYPE	A	B	D	E	F	H	R	Notes
134200	6 TG	38,5	4	15	5	30	30	6	
138200	8 TG	51	6	17	7,5	35	40	8	
338200	8 TGs	51	6	17	7,5	35	40	8	*

* Packaged in transparent blisters





ANCHORS AND SEALANTS

GIOLLI PLUGS WITH SCREWS

MATERIALS TECHNICAL DATA

PLUG

PP Polypropylene

SCREW

Steel 4.8 EN ISO 898-1 with electro zinc plating 7-8 µm and heat treatment

BASE MATERIAL

Solid masonry | Aerated cellular concrete (Gasbeton) | Hollow brick walls | Cement | Prestressed concrete

INSTALLATION

In order to install the plug properly make a hole perpendicularly to the base support using the right drill bit. Before applying the plug make sure the hole is completely clean and all drilling dust has been removed. We recommend not to use an impact drill while making the hole on an hollow brick wall in order to prevent the internal bulkheads break. Insert the plug and make the required installation.

INSTALLATION TOOLS AND RECOMMENDATIONS

Drill with proper drill bit.

Do not use the impact drill to prevent breaking the internal bulkhead of the brick.

PACKAGING

In cardboard box | In transparent blisters

DATA 09-2020 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation. Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it

T 05.30.152 REV 0

