





TNY plug and screw

APPLICATION

Used to fasten FLIP SYSTEM pipe clamps on masonry.

FEATURES AND BENEFITS

- > Thanks to the radial distribution via 6 different directions, a different way to act on hollow and solid materials, and an innovative design of its structure, it ensures greater expansion and the chance to **optimize load capacity**.
- > **Very quick** anchoring system thanks to the antirotation fins.
- > Its **versatility** allows it to adapt to different kinds of building materials and applications, ensuring the best performances in soft fastening installations.

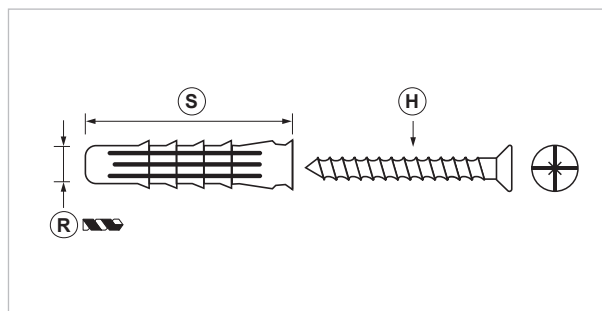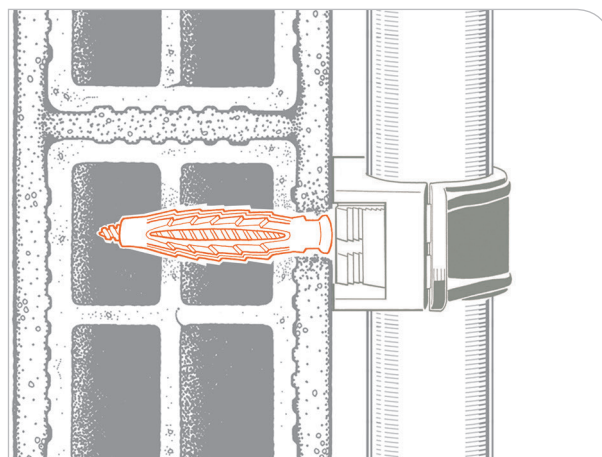


COD	TYPE	S	H	R
181070	TNY 10	50	6x70	10


MATERIAL TECHNICAL DATA
PLUG

Polyamide PA6 halogen-free - Grey RAL 7035

SCREW

Steel 4.8 EN ISO 898.1 with electro zinc plating 7-8 µm

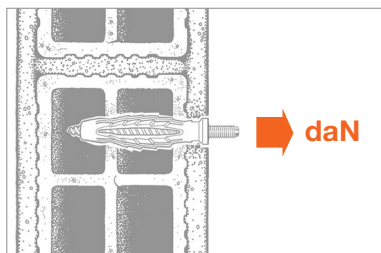RECOMMENDED LOADS


	N rec (traction)
Concrete C20/C25*	68
Solid bricks**	60
Double UNI hollow bricks**	46
Hollow bricks**	23
Concrete hollow bricks	52

Recommended load is the average resistance loads with a safety coefficient. 1 daN=1 kg. - *C20/25 = 250 kg/cm²

**Different kinds of brick may determine values as compared to those in the chart.

PACKAGING

In plastic bag

DATE 03-2019 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it

T 03.13.60 REV 0

