



VLM Double thread screw

APPLICATION

Used to fix objects to the wall with metric thread.

FEATURES AND BENEFITS

- > **Double thread:** the metric one for the connection, the wood one for the plug.

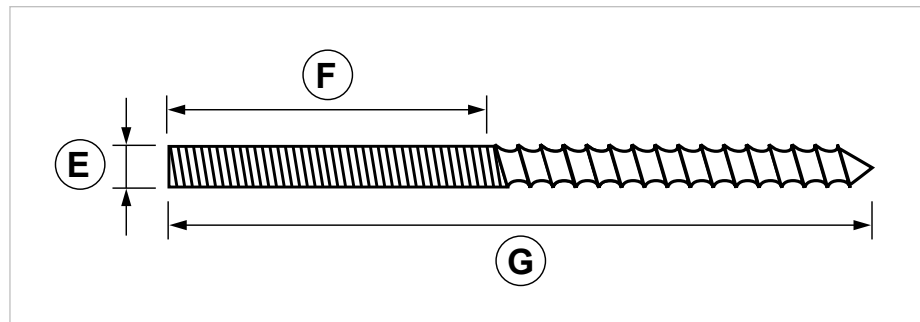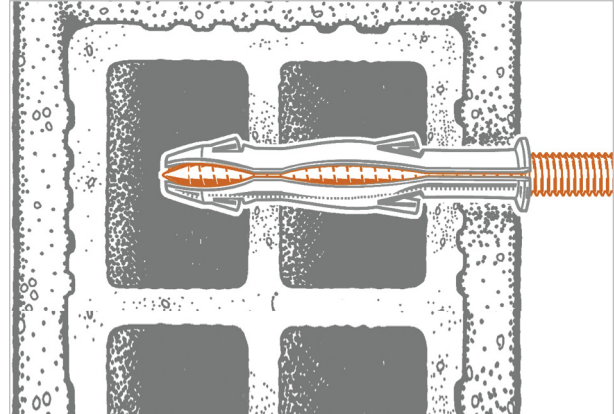

COD	TYPE	E	F	G	Notes
164690	VLM 6	M6	30	90	
164700	VLM 8	M8	30	90	
164701	VLM 8X140	M8	80	140	
164702	VLM 8X200	M8	140	200	
164710	VLM 10	M10	30	100	
164711	VLM 10X140	M10	70	140	
164712	VLM 10X180	M10	90	180	*
164713	VLM 10X220	M10	90	220	**

* Within the metric thread and the wood one there's a non-threaded section 20 mm long.

** Within the metric thread and the wood one there's a non-threaded section 60 mm long.

ANCHORS AND SEALANTS

TECHNICAL SCREWS

MATERIALS TECHNICAL DATA

SCREW

Steel 4.8 EN ISO 898-1 with electro zinc plating 7-8 µm

BASE MATERIAL

Solid masonry - Aerated cellular concrete (Gasbeton) - Hollow brick walls - Cement - Prestressed concrete

INSTALLATION

In order to install the plug properly make a hole perpendicularly to the base support using the right drill bit. Before applying the plug make sure the hole is completely clean and all drilling dust has been removed. We recommend not to use an impact drill while making the hole on an hollow brick wall in order to prevent the internal bulkheads break. Insert the plug and make the required installation.

INSTALLATION TOOLS AND RECOMMENDATIONS

Drill with proper drill bit.

Do not use the impact drill to prevent breaking the internal bulkhead of the brick.

PACKAGING

In cardboard box

DATE 06-2023 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it