

### ANG R SNO





#### Universal joint with pivot head for threaded rods

#### APPLICATION

It is used to set up lateral and longitudinal supports.

#### FEATURES AND BENEFITS

- > It is suitable to be **directly fastened on concrete**, and to connect supporting structures using the M10 threaded rod.
- > It makes earthquake-resistant supports **installation easier**.
- > It can be set on G-Strut channels using **R1 washer, JDA10 square nut, D10 hexagonal nut, RO10 washer**.
- > It can be set on Grip channels using **DM10 bolt, D10 hexagonal nut and RO10 washer**.
- > It can be installed right on G-Strut angle brackets using **BU10 bolt and D10 nut**.

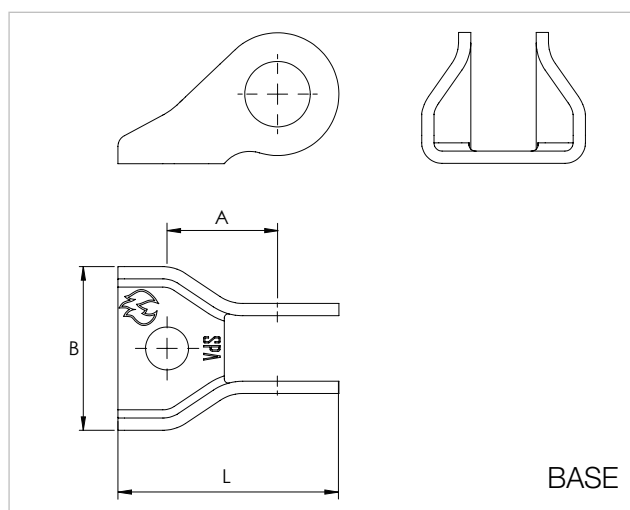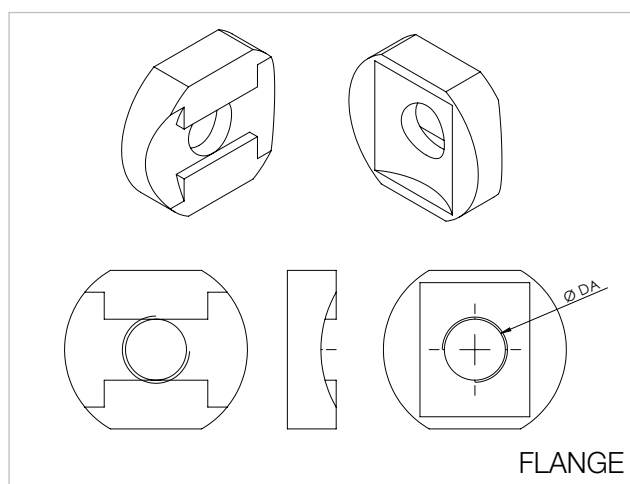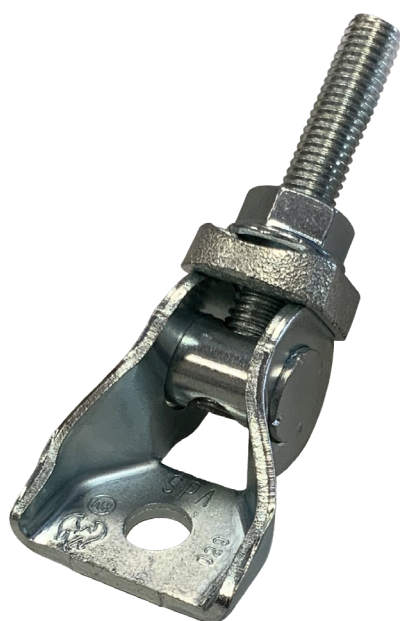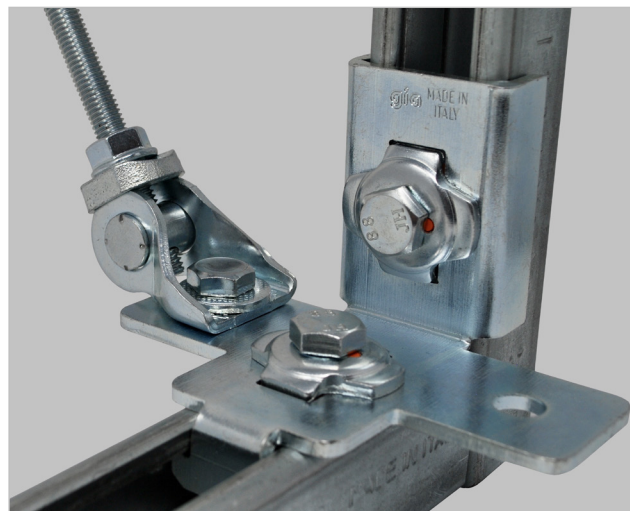

COD	TYPE	Description	A	B	L	Ø DA
161753	ANG R SNO	For BF 10	26 mm	40 mm	51 mm	10,5 mm

# SEISMIC-STRUT

## INDUSTRIAL FIXING SYSTEM

### MATERIALS TECHNICAL DATA

#### MATERIAL

Steel DX51D EN 10142 with sendzimir zinc-plating

#### BASE MATERIAL

Concrete

### RECOMMENDED LOADS

COD.	Recommended load
161753	800 daN

Recommended load in case of fire				
COD.	30 min.	60 min.	90 min.	120 min.
161753	60 daN	60 daN	54 daN	42 daN

### PACKAGING

In cardboard box

### RELATED ITEMS

- > G-STRUT heavy duty industrial fixing system
- > GRIP light duty industrial fixing system

### DATE 07-2023 REV. 00

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – [www.gia.it](http://www.gia.it)

