

BL 2



Wall fixing for water heaters and boilers

APPLICATION


Used to fasten **water heaters** and **boilers** on **masonry**.

FEATURES AND BENEFITS

- > The partially threaded hook allows to **axially adjust the bulge**.
- > The Giolli plug - included in the package - makes the fixing **reliable on any kind of masonry**.

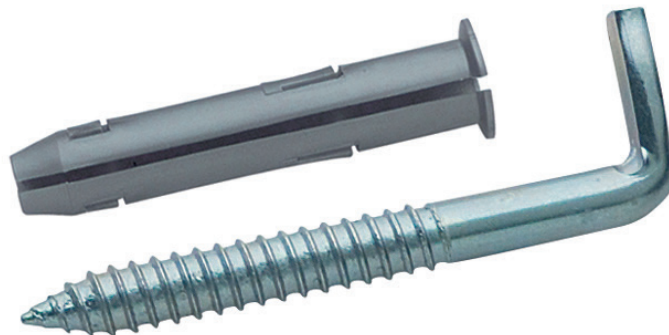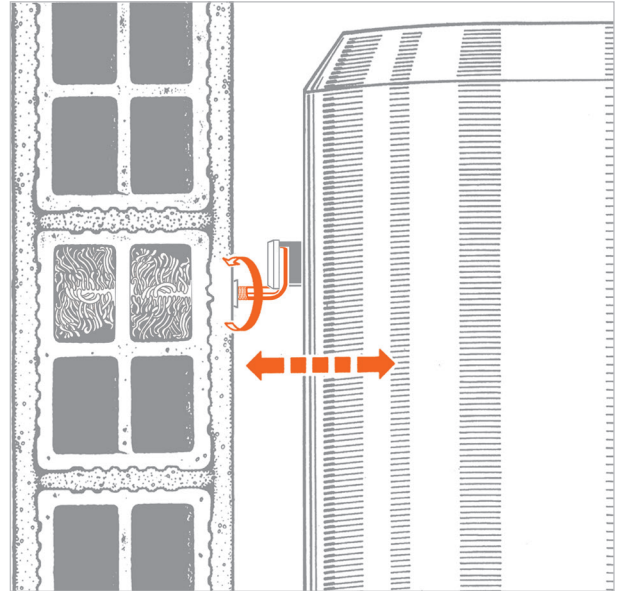

Composed of:
- steel hook
- Giolli plug

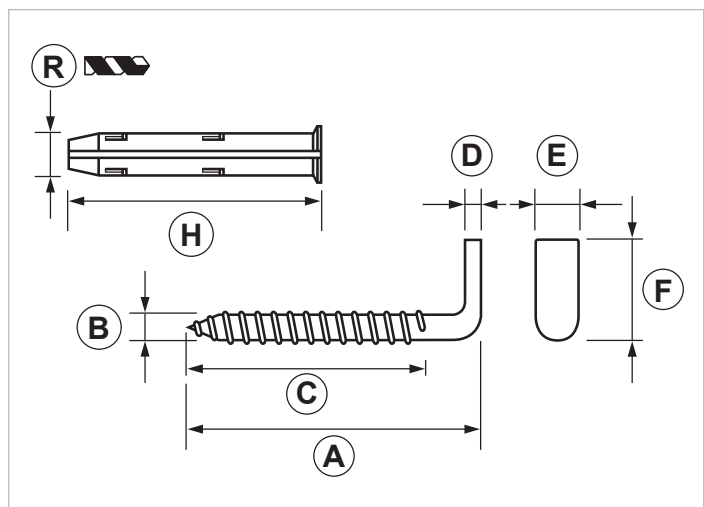

COD	TYPE	A	B	C	D	E	F	H	R
032150	BL 2	94	10	60	4	13,5	30	70	12

WATER HEATERS AND BOILERS FIXING

SANITARY FIXINGS

MATERIALS TECHNICAL DATA

PLUG

PP Polypropylene


SCREW

Steel 4.8 EN ISO 898.1 with electro zinc-plating 7-8 μm

BASE MATERIAL

Cement - Masonry - Plastered hollow brick - Prestressed support

RECOMMENDED LOADS

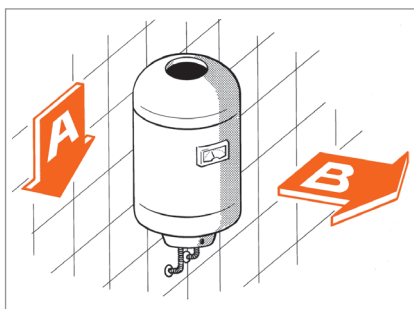

	A	B
BL 2	100	80

A = Payload value in daN.

B = Axial payload value in daN.

Data refer to the installation of the water heater using 2 items.
1 daN=1kg

INSTALLATION

In order to properly install the plug, make a hole perpendicularly to the base support with the right drill bit. The hole must be cleaned up from drilling dust before applying the plug. Do not use impact drill on an hollow brick wall, in order to prevent internal bulkheads breakage. Insert the plug and the hook.

INSTALLING TOOLS AND RECOMMENDATIONS

Drill, with drill bit $\varnothing 12$.

PACKAGING

In polyethylene bags | 2 items per bag

DATE 07-2022 REV. 01

The current technical data sheet substitutes and nullifies the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without previous notice.

Company under the management of "Ethica Global Investments S.p.A."

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it