

BLR



Adjustable wall fixing for water heater and boilers

APPLICATION

Used to fasten **water heaters** and **boilers** on **masonry**.


FEATURES AND BENEFITS

- > It allows to **adjust both height and distance** from the wall.
- > The screw - welded to the hook - makes this fixing **particularly solid**.
- > The Giolli plug - included in the package - makes the fixing **reliable on any kind of masonry**.

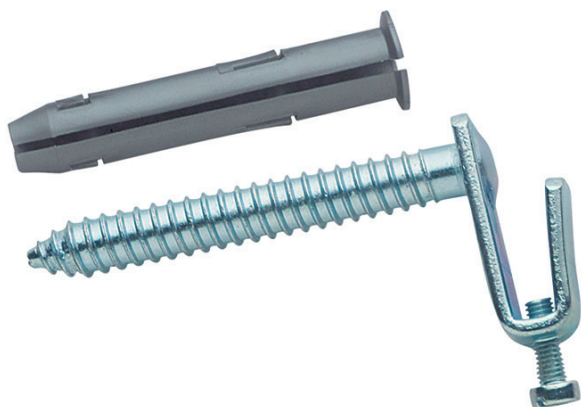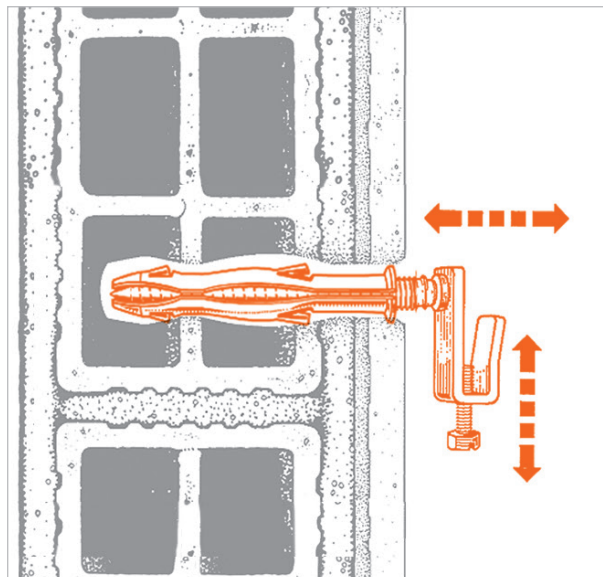

Composed of:

- adjustable threaded hook 10x83, welded to TC M5x14 steel screw
- Giolli plug

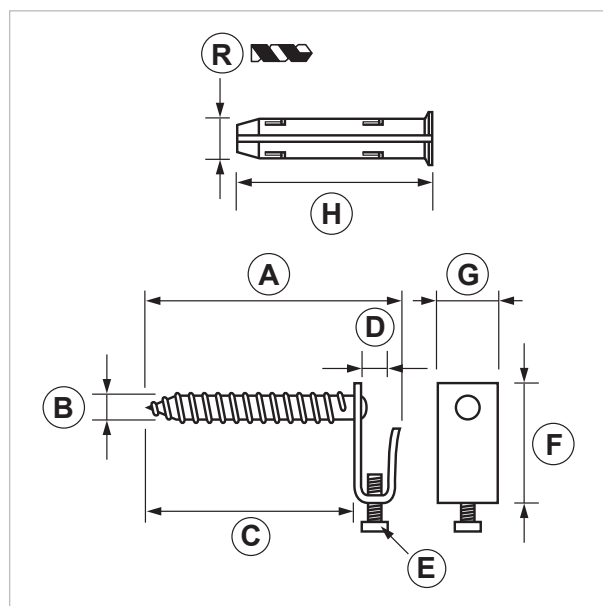

COD	TYPE	A	B	C	D	E	F	G	H	R
032200	BLR	83	10	70	7	TC M5x14	40	20	70	12

WATER HEATERS AND BOILERS FIXING

SANITARY FIXINGS

MATERIALS TECHNICAL DATA

PLUG

PP Polypropylene


SCREW

Steel 4.8 EN ISO 898.1 with electro zinc-plating 7-8 μm

BASE MATERIAL

Cement - Masonry - Plastered hollow brick - Prestressed support

RECOMMENDED LOADS

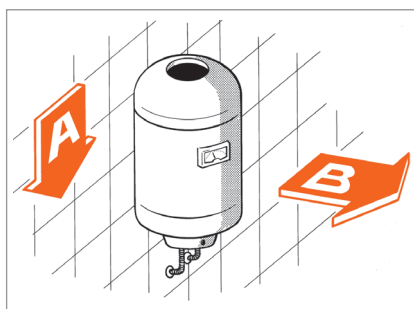

	A	B
BLR	100	50

A = Payload value in daN.

B = Axial payload value in daN.

1daN=1kg

INSTALLATION

In order to properly install the plug, make a hole perpendicularly to the base support with the right drill bit. The hole must be cleaned up from drilling dust before applying the plug. Do not use impact drill on an hollow brick wall, in order to prevent internal bulkheads breakage.

Insert the plug and the hook.

Adjust the hook at the right distance from the wall.

INSTALLING TOOLS AND RECOMMENDATIONS

Drill, with drill bit $\varnothing 12$.

PACKAGING

In polyethylene bags | 2 items per bag

DATE 07-2022 REV. 01

The current technical data sheet substitutes and nullifies the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without previous notice.

Company under the management of "Ethica Global Investments S.p.A."

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it