

LR 14


Fixing for wall hung washbasins

APPLICATION

Used to fasten washbasins on masonry.


FEATURES AND BENEFITS

- > **Highly resistant** anchoring either on hollow brick walls or cinder blocks.
- > Thanks to the exclusive cam washer it is possible to **adjust the washbasin level during installation**.
- > The nylon washer **protects the ceramic** during tightening.
- > **Longlasting** vertical fastening.

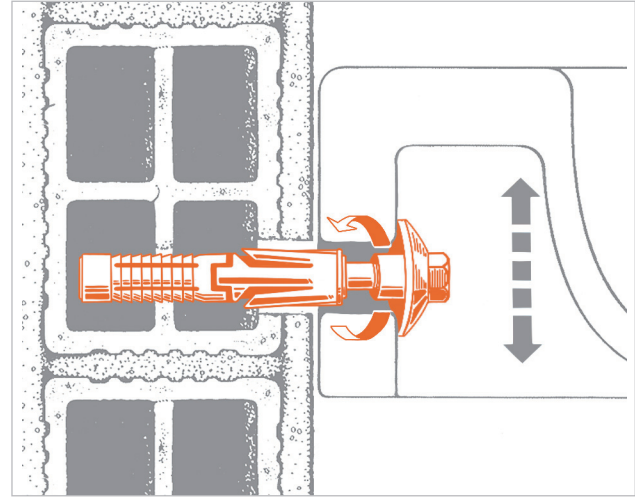

Composed of:

- M10 double threaded screw, zinc-plated e passivated
- Polyamide 6 plug with metal cone
- Cam washer
- M10 locking nut

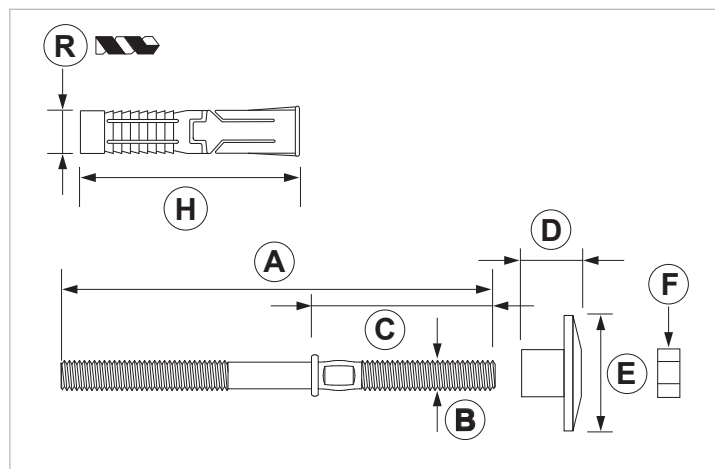

COD	TYPE	A	B	C	D	E	F	H	R	Min. drilling depth	Max. fixing thickness
030205	LR 14	130	M10	55	21	40	M10	75	14	75	14

WASHBASIN AND WASHTUG FIXING

SANITARY FIXINGS

MATERIALS TECHNICAL DATA

ANCHORS

Polyamide 6 RAL 7035 with metal cone

SCREW

Steel 4.8 EN ISO 898.1 with electro zinc-plating 7-8 μm


CAM WASHER

Nylon PA6

BASE MATERIAL

Cement - Masonry - Plastered hollow brick - Prestressed support

RECOMMENDED LOADS

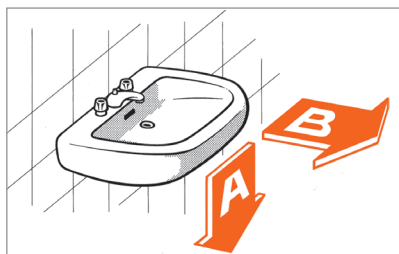

	A	B
LR 14	100	44

A = Payload value calculated in daN, with a cantilever load of mm 600.

B = Axial payload value calculated in daN.
Hollow brick wall and tiles cover.
1 daN=1kg

INSTALLATION

In order to properly install the plug, make a hole perpendicularly to the base support with the right drill bit. The hole must be cleaned up from drilling dust before applying the plug. Do not use impact drill on an hollow brick wall in order to prevent internal bulkheads breakage.

Eventually, insert the plug and complete the installation by completely fixing the item.

Use the cam washer to properly align the washbasin.

INSTALLING TOOLS AND RECOMMENDATIONS

Drill, with drill bit $\varnothing 14$.

PACKAGING

In polyethylene bags | 2 items per bag

DATE 07-2022 REV. 00

The current technical data sheet substitutes and nullifies the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without previous notice.

Company under the management of "Ethica Global Investments S.p.A."

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it