


PAP 30-100 PF3 cantilever arm bracket

APPLICATION

For pipe lines installation on wall, ceiling or floor.

FEATURES AND BENEFITS


- > The rail sides bending **prevent connection parts from sliding.**
- > It is made of **PF3 strut channel** and complete with closing cap.

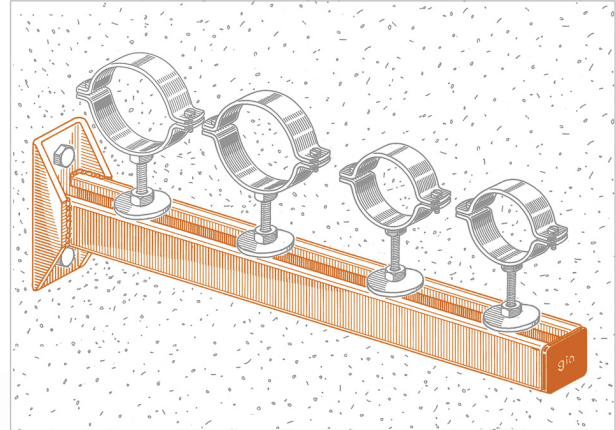


PAP 30 - 40



PAP 50 - 75 - 100

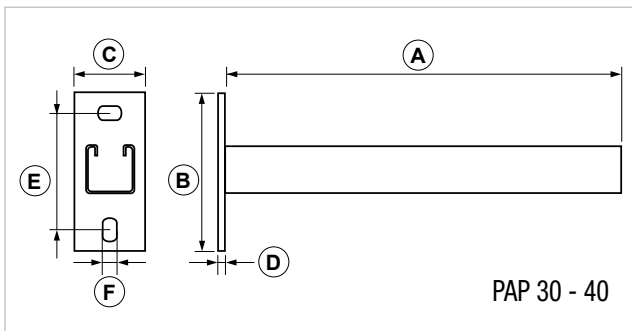

PAP 30 - 40

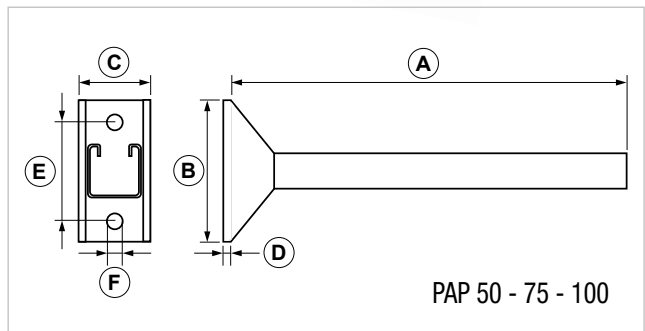

PAP 50 - 75 - 100

COD	TYPE	Strut channel	Finishing	A	B	C	D	E	F
161228	PAP 30	PF3	Zinc plating	300	130	50	6	95	12,5
161229	PAP 40	PF3	Zinc plating	400	130	50	6	95	12,5
161230	PAP 50	PF3	Zinc plating	500	130	53	5	90	14
161233	PAP 75	PF3	Zinc plating	750	130	53	5	90	14
161235	PAP 100	PF3	Zinc plating	1000	130	53	5	90	14

INDUSTRIAL FIXING SYSTEMS




SUPPORT BRACKETS

MATERIALS TECHNICAL DATA

PF3 - PF4

Carbon steel EN 10111 DD11 with sendzimir galvanization

RECOMMENDED LOADS

TYPE	 F1 = daN	 F1 = daN	 F2 = daN	 Q = daN
PAP 30	180	90	90	180
PAP 40	140	80	80	140
PAP 50	185	95	95	185
PAP 75	125	60	60	125
PAP 100	90	30	30	90

F = concentrated load in daN. - **Q** = uniform load in daN.

Admissible tension 140 N/mm². - Admissible deflection L/125.

The indicated values are loads with perfect elastic return.

For wall fastening please consider the supporting performance of the plug or the connection piece.

PACKAGING

In cardboard box

RELATED ITEMS

- > Threaded rod
- > Pipe clamps

DATE 06-2023 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it