



SIP PE foam protection strip for sanitary fixtures

APPLICATION

Floor protection for sanitary fixtures.

FEATURES AND BENEFITS

- > Made of **insulating polyethylene foam PE30**, which is resistant to compression and mould, and waterproof. The use of standard chemical cleaning detergents does not affect the product's quality.
- > When applied on the whole edge of the sanitary fixture, **it prevents the risk of breaking or damaging** both the ceramic and the finished floor.
- > Thanks to its specific shape it can be easily applied **even on particularly narrow bends** of the sanitary fixture.

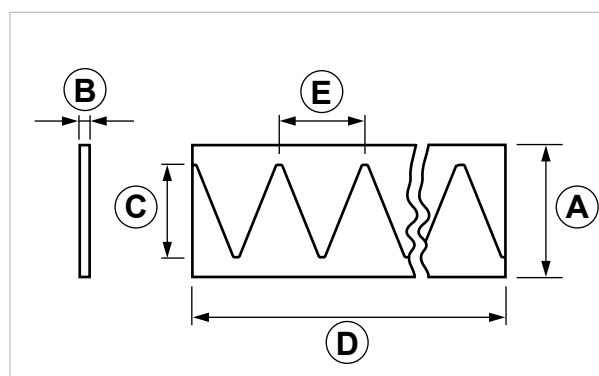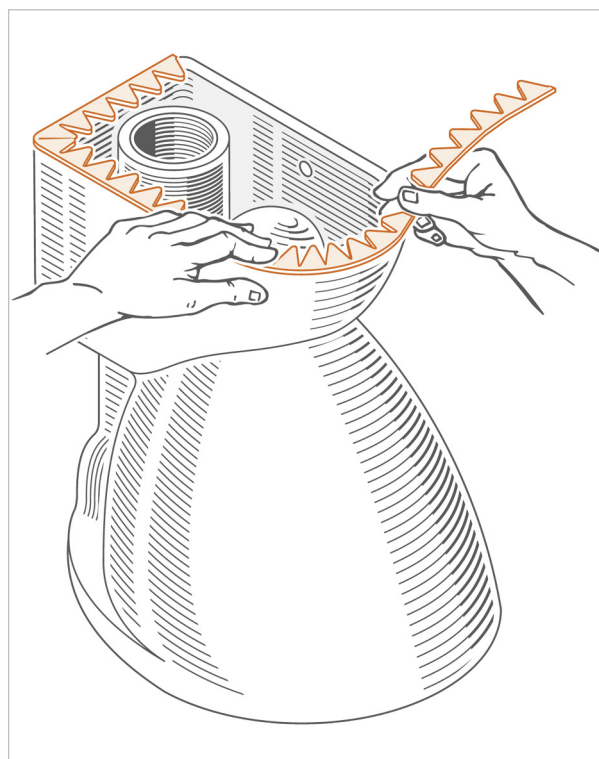

COD	TYPE	A	B	C	D	E
020509	SIP	40	3	28	5 mt.	26

MATERIALS TECHNICAL DATA

MATERIAL

White adhesive PE30 polyethylene netting foam - Isolene AU with closed cellular structure

DENSITY

33kg/m³ ISO 845

WATER ABSORPTION

<1%

USAGE TEMPERATURE

- 80°C / + 100°C

BREAKAGE PAYLOAD

Longitudinal: 360kPa - Transversal: 220kPa

AIR + U.V. RAYS RESISTANCE

Good

RESISTANCE TO COMPRESSION

At 25% - 0,37kPa

HARDNESS - SHORE 0/00

15/50

CONDUCTIVITY

0,34 W/Km a 10°C - 0,039 W/Km a 40°C

FIRE RESISTANCE

E EN 13501

PACKAGING

In polyethylene bag | 1 roll of 5mt.

DATA 07-2022 REV. 01

La presente scheda tecnica sostituisce ed annulla le precedenti. Le informazioni corrispondono alle nostre attuali conoscenze. Da esse non possono derivare nostre responsabilità e nessuna rivalsa.

Gia S.p.A. si riserva il diritto di modificare caratteristiche tecniche e modelli senza obbligo di preavviso.

Società soggetta a direzione e coordinamento di "Ethica Global Investments S.p.A."

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it