

SUV 2



Bracket with brass connection for expansion vessels

APPLICATION

Used to fasten and install expansion vessels for solar panels and sanitary water.

FEATURES AND BENEFITS

- > Bracket complete **with 3/4" brass joint** - compliant with DM 174 certification - for sanitary water distribution.
- > Strong, with high load capacity: It can support **vessels up to 50 liters** (F = 60 kg).
- > **Telescopic**: the distance from the wall can be adjusted from 160 mm up to 220 mm.
- > **Universal**: it is suitable for any kind of expansion vessels.

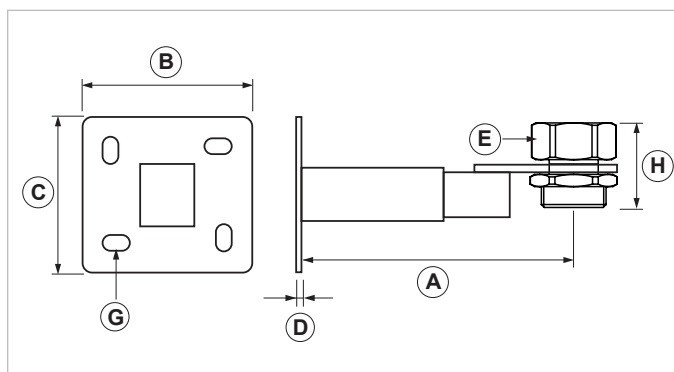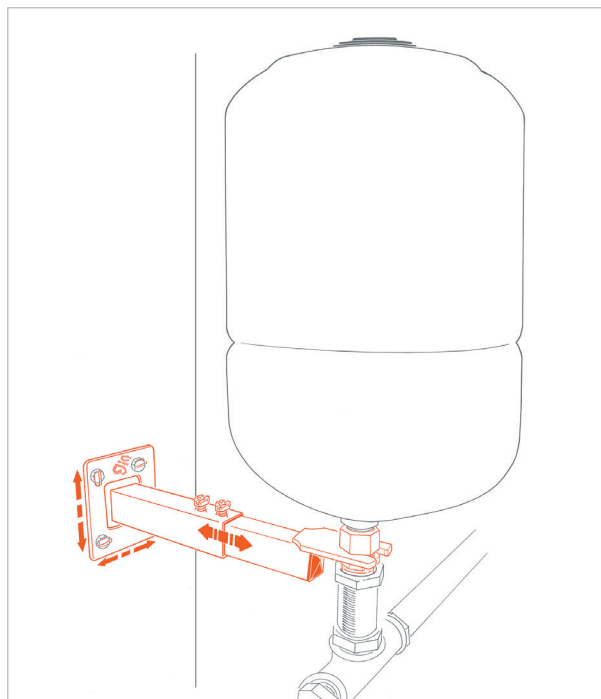

COD	TYPE	Application	A	B	C	D	E	G	H
075525	SUV 2	Solar panels and ACS	160-220	95	87	3	G 3/4" F-M	9x15	34,5

FIXING'S ACCESSORIES

BRACKETS FOR EXPANSION VESSELS

MATERIALS TECHNICAL DATA

MATERIAL

Steel DD11 EN 10111 with electro zinc plating 7-8 μm


SCREWS

Steel 4.8 EN ISO 898.1 with electro zinc plating 7-8 μm - Hex head combined shear screws

VALVE

Brass CW 614N - UNI EN 12164 certified DM 174

RECOMMENDED LOADS

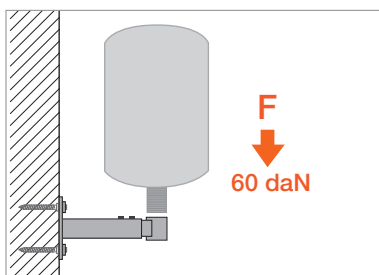

TYPE	F
SUV 2	60

Recommended load is the average resistance loads with a safety coefficient.
1 daN=1kg.

INSTALLATION

Easier vessel's installation:

1. Fix the plate to the wall
2. Fix the sleeve on the fork-shaped telescopic arm.
3. Set and fasten the vessel on the fork-shaped telescopic arm.
4. Insert the telescopic arm and pinpoint adjust it.

PACKAGING

In bag - 1 bracket complete with accessories

RELATED ITEMS

> Anchors: Giolli, 10TB, TCO, TLA, TBF

DATE 11-2022 REV. 01

The current technical data sheet substitutes and nullifies the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without previous notice.

Company under the management of "Ethica Global Investments S.p.A."

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it