





Slotted pipe clamp for heavy duty strut channels

APPLICATION

Pipe lines fastening on heavy duty strut channels.

FEATURES AND BENEFITS

- > **Quick installation:** with just a simple half rotation it fits in at any point of the channel.
- > It allows to provide **banks of parallel pipe lines** to be fixed in a fast and easy way.

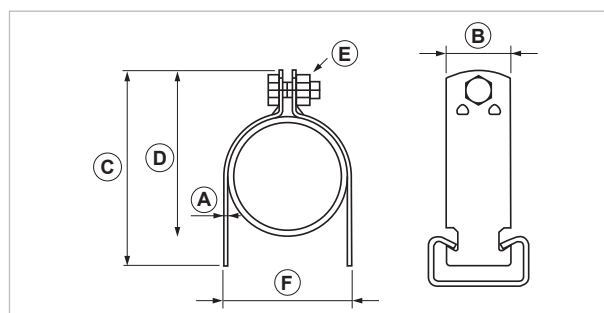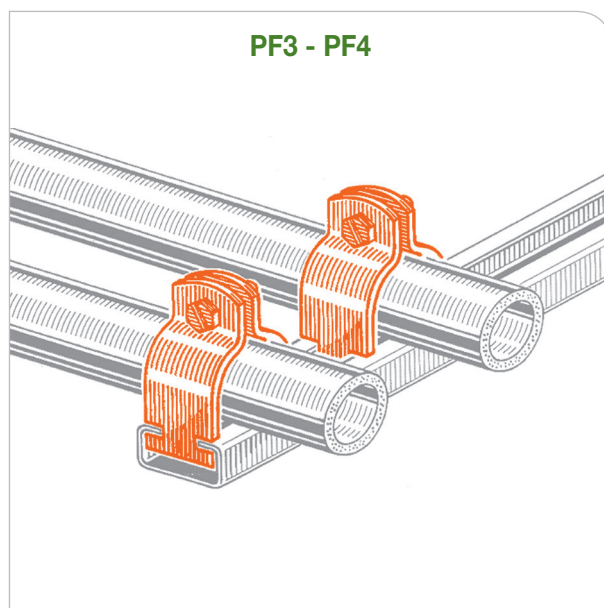

COD	TYPE	For pipe lines Ø mm	A	B	C	D	E	F
083910	CPF3 1/2"	22	2	32	57	43	M8x25	26
083915	CPF3 3/4"	28	2	32	63	49	M8x25	32
083920	CPF3 1"	35	2	32	70	56	M8x25	39
083925	CPF3 1 1/4"	44	2	32	78	64	M8x25	48
083930	CPF3 1 1/2"	50	2	32	86	72	M8x25	54
083935	CPF3 2"	62	2	32	96	82	M8x25	66
083940	CPF3 2 1/2"	78	2	32	112	98	M8x25	82
083945	CPF3 3"	90	2	32	125	111	M8x25	94
083955	CPF3 4"	116	2	32	150	136	M8x25	120
083960	CPF3 5"	141	2	32	176	162	M8x25	145

**MATERIAL TECHNICAL DATA****MATERIAL**

Steel S235 JR - EN 10025

GALVANIZATION


Electro zinc plating 7-8 µm

SCREW - NUT

Steel 4.8 EN ISO 898.1 galvanized

COMPONENTS GALVANIZATION

Electro zinc plating 7-8 µm

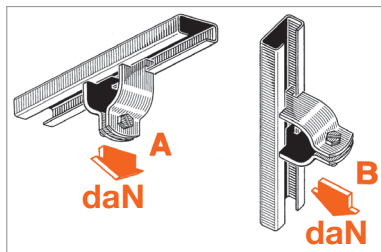RECOMMENDED LOADS

Recommended load is the average resistance loads with a safety coefficient. Data in daN.
1 daN=1 kg.

TYPE	A	B
CPF 3/8"	200	20
CPF - CPF3 1/2"	200	20
CPF - CPF3 3/4"	200	30
CPF - CPF3 1"	200	30
CPF - CPF3 1 1/4"	200	30
CPF - CPF3 1 1/2"	300	40
CPF - CPF3 2"	300	40
CPF - CPF3 2 1/2"	300	40
CPF - CPF3 3"	300	40
CPF - CPF3 4"	300	40
CPF3 5"	300	40

PACKAGING

In box

RELATED ITEMS

- > PF3 and PF4 strut channels
- > PG - EPDM sheath

DATE 03-2019 REV. 00

The current technical data sheet substitutes and cancels the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it

T 03.14.65 REV 0

