



CTR Adjustable pipe clamp

APPLICATION

It is used to fasten light duty pipe lines on the wall.

FEATURES AND BENEFITS

- > **Quick installation:** the plug is integrated with the pipe clamp in a single shape in order to be easily inserted in the wall - together with the screw - by using a hammer.
- > It is **particularly suitable for copper pipe lines**, and it can also be used for any other kind of pipe line.
- > This peculiar product - provided with easily removable thicknesses - is designed to fasten **pipe lines with different diameters by using a single item.**

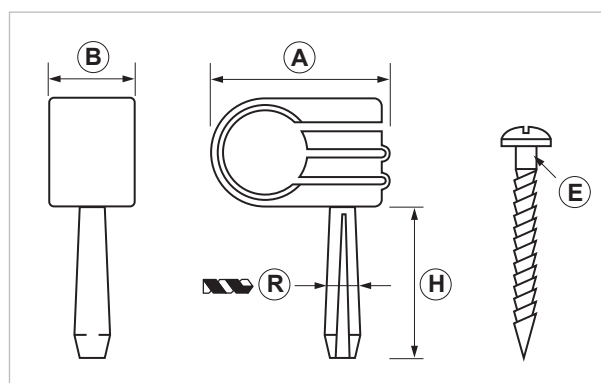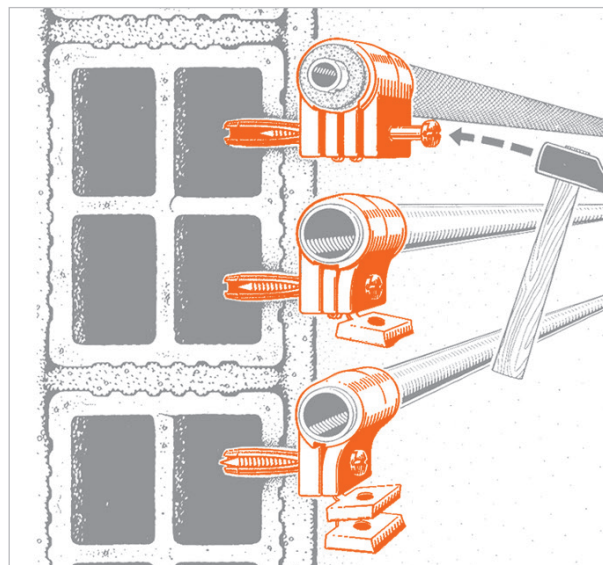

COD	TYPE	For pipes Ø mm	A	B	E	H	R
093003	CTR 10/14	10-14	28	12	TCC 3,3X35	25	5
093004	CTR 15/20	15-20	37	14	TCC 4X45	30	6
093005	CTR 21/28	21-28	47	16	TCC 6X58	40	8

NYLON PIPE CLAMPS

PIPE CLAMPS AND PIPE LINES FIXINGS

MATERIALS TECHNICAL DATA

PIPE CLAMP

Grey Nylon PA6

SCREW

Steel 4.8 EN ISO 898.1 with electro zinc-platingx 7-8 µm - Rounded head combined shear screw

BASE MATERIAL

Masonry and hollow brick

INSTALLATION TOOLS AND RECOMMENDATIONS

In order to install the plug properly, make a hole perpendicularly to the base support using the right drill bit. Before installing the plug make sure the hole is clean and all the drilling dust has been removed.

We recommend not to use an impact drill while making the hole on an hollow brick wall in order to prevent the internal bulkheads break.

Eventually, insert the screw into the pipe clamp and fasten the whole assembly.

PACKAGING

In polyethylene bag

DATA 09-2022 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it