




GICOLLAR® Interlocking copper pipe clamp

APPLICATION

Copper pipe lines fastening.

FEATURES AND BENEFITS

- > It allows to **quickly fasten** copper pipe lines, while **preventing electrolysis events**, which may damage the copper pipe line.
- > It fastens the pipe simply by using the **patented interlocking system**, and locking it by tightening the provided locking screw.
- > The small size makes Gicollar particularly suitable to create **banks of parallel pipe lines**.

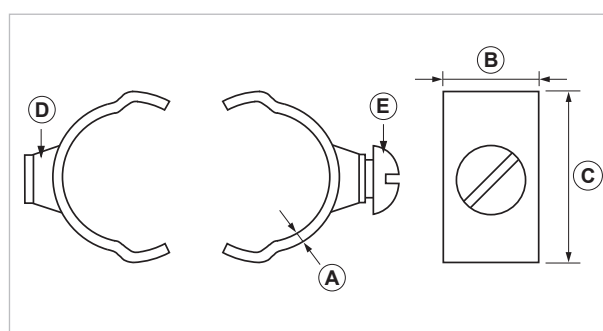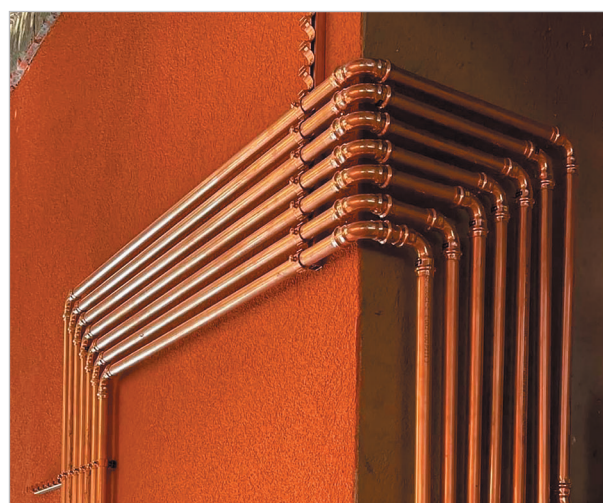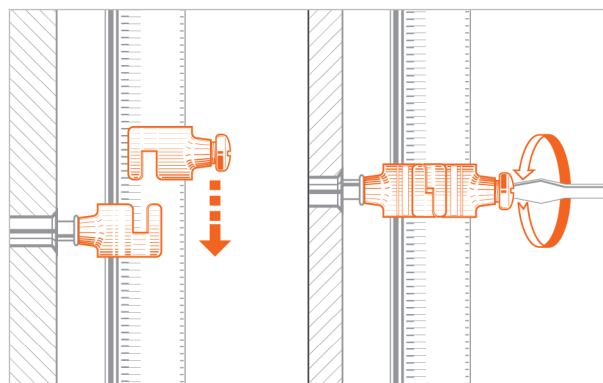

COD	TYPE	For pipes Ø mm	A	B	C	D	E
091030	GICOLLAR 12	12	1,50	15	15	M6	TCCI 6X7,5
091040	GICOLLAR 14	14	1,50	15	20,5	M6	TCCI 6X7,5
091060	GICOLLAR 15-16	15-16	1,50	15	22,5	M6	TCCI 6X7,5
091070	GICOLLAR 18	18	1,50	15	24,5	M6	TCCI 6X7,5
091090	GICOLLAR 22	22	1,50	15	29,5	M6	TCCI 6X7,5
091130	GICOLLAR 28	28	1,50	15	35,5	M6	TCCI 6X7,5
091150	GICOLLAR 35	35	1,50	15	44,5	M6	TCCI 6X7,5

COPPER PIPE CLAMPS


PIPE CLAMPS AND PIPE LINES FIXINGS

MATERIALS TECHNICAL DATA

PIPE CLAMP

Copper EN 1652

RECOMMENDED LOADS

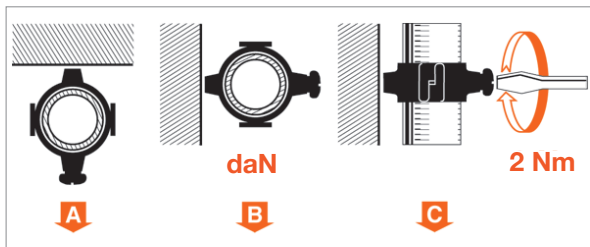

Recommended load is the average resistance load with a safety coefficient.

Data are expressed in daN. 1 daN=1 kg.

RECOMMENDED LOADS

CODE	TYPE	A	B	C
091030	GICOLLAR 12	50	35	40
091040	GICOLLAR 14	50	35	40
091060	GICOLLAR 15-16	50	35	40
091070	GICOLLAR 18	50	35	40
091090	GICOLLAR 22	50	35	40
091130	GICOLLAR 28	50	35	40
091150	GICOLLAR 35	50	35	40

PACKAGING

In polyethylene bag

RELATED ITEMS

- > GIPROFIL - Copper strut channel with fixing kit
- > GIDADO - Fixing kit for copper channel
- > VGR - Threaded screw and plug for copper pipe clamps
- > VLGR 6 - Long screw and plug for copper pipe clamps

DATA 09-2022 REV. 01

The current technical data sheet substitutes and cancels the previous ones. The details provided fit our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without notice.

This company is subject to "Ethica Global Investments S.p.A." management.

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – www.gia.it