

NEW



# BRACKETS FOR WALL HUNG BATHROOM FIXTURES

A complete range of supports to install  
WALL HUNG TOILET BOWLS AND BIDETS

HANDY  
VERSATILE  
SAFE



sistemi di fissaggio brevettati



1

Make the breaks in the masonry, fit the bracket in and level it .



2

Fix the bracket with a wooden crossbeam and wall it in through its shaped ends.



3

Insert the fixing pivots at the desired height.



4

Level the fixing pivots.



5

Set drain pipes and water supply pipes - for either toilet bowl or bidet - in the right place. Wall the bracket in.

# SVELTA EVO

BRACKET FOR WALL HUNG TOILET BOWLS AND BIDETS



# AZZURRA

PREASSEMBLED BRACKET FOR WALL HUNG BIDETS

1



Set the bracket inside the wall.

2



Wall the bracket in.

3



Adjust the plate in height if necessary.

4



Fix the drain pipe on the pipe clamp and adjust it in height.


5



Fix drop elbows or sleeves.

# Rossa


## PREASSEMBLED BRACKET FOR WALL HUNG TOILET BOWL

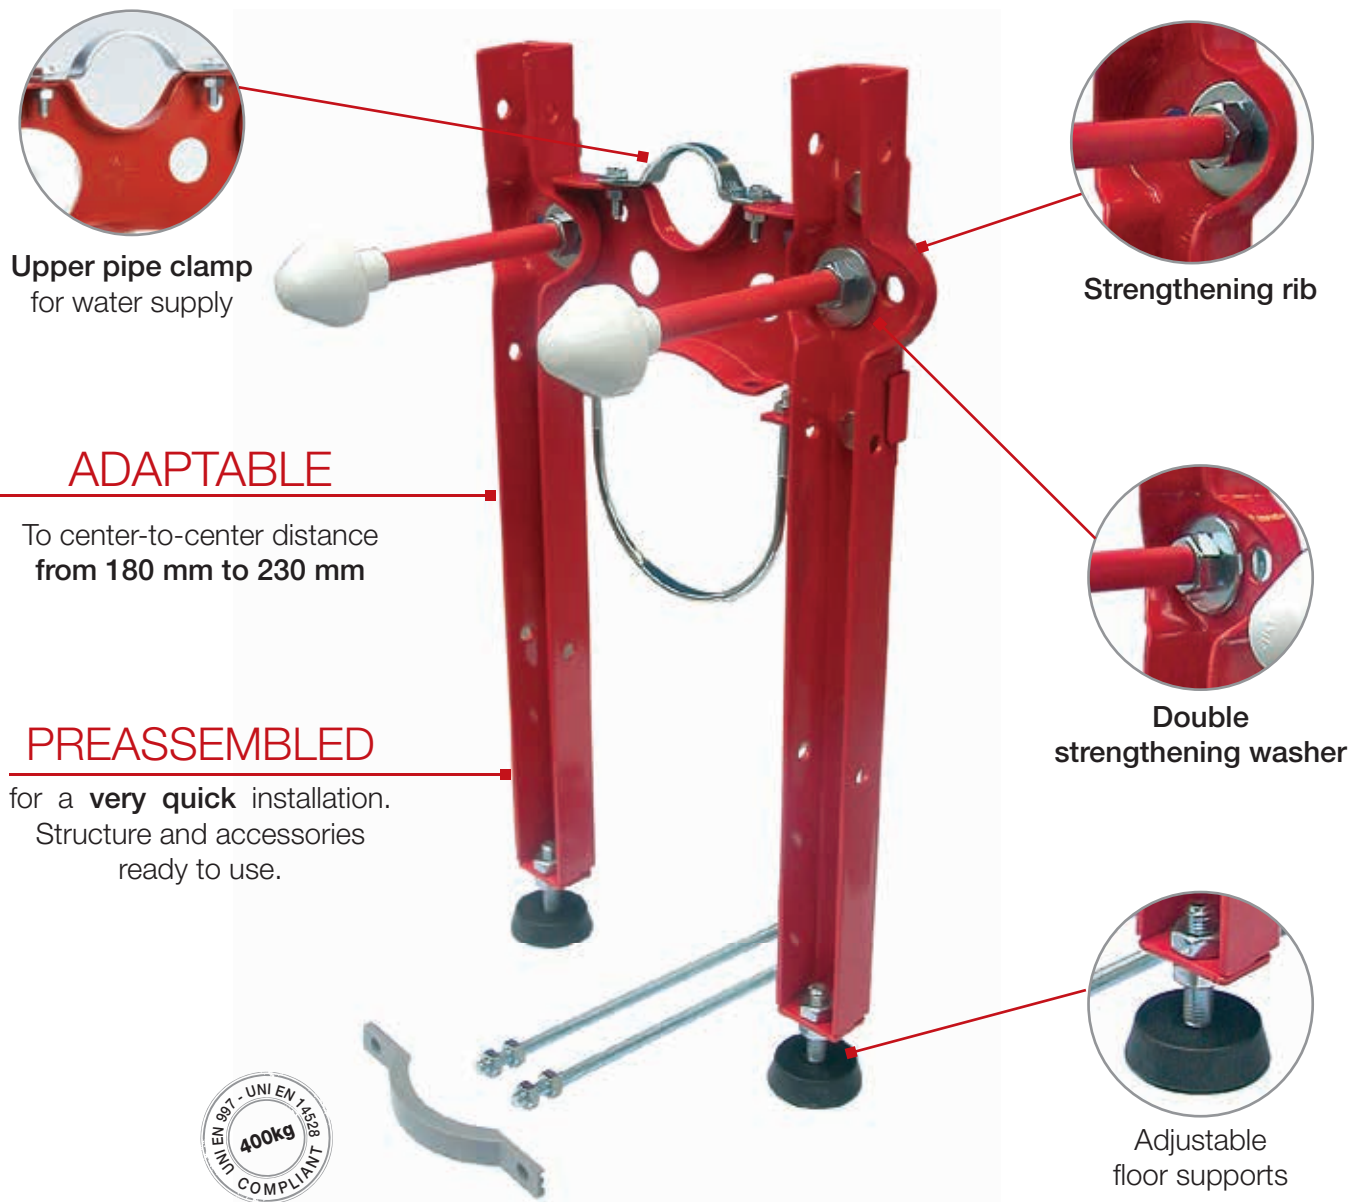

### THE SOLID LANDMARK

Complete with moulded reduction piece to fix  
**DRAIN PIPES OF 90 mm AND 110 mm.**

Instructions - included in each box - provide  
installation details and dimensions for  
**more than 300 kinds of bathroom fixtures.\***

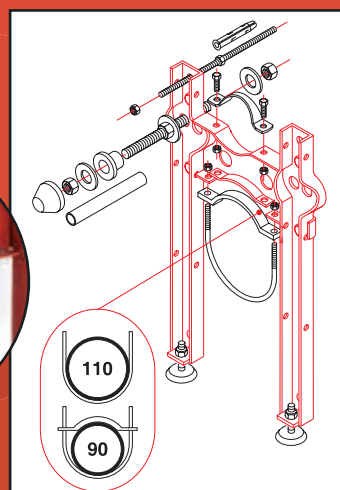


\*GIA offers the same service for AZZURRA and BIANCA brackets as well.



# AZZURRA



## PREASSEMBLED BRACKET FOR WALL HUNG BIDET



**SOLID**



**11 mm thick sheet,**  
two crosswise plates and  
strategic reinforcements to  
increase reliability



**Strengthening rib**



**Adjustable  
floor supports**

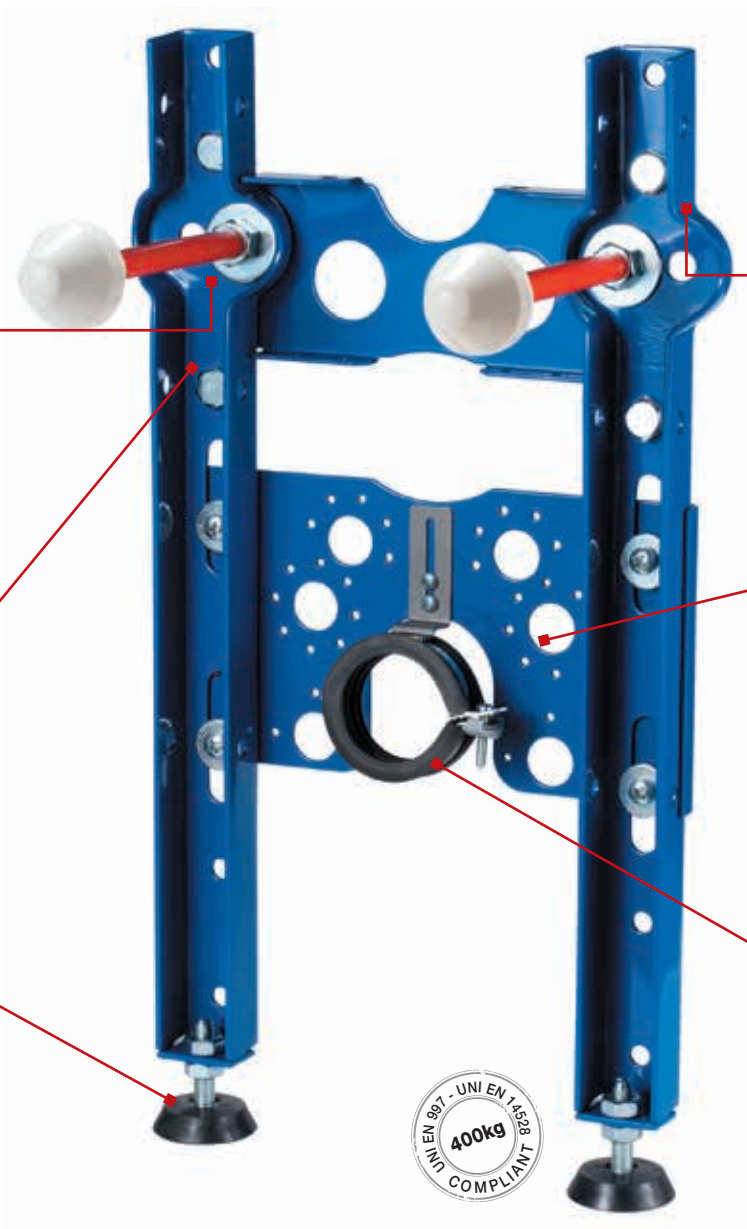

**COMPACT**

**Only 33,5 mm thick,** in order  
to be installed in 8 cm thick  
partition walls without breaking  
both walls




**Multiple ways to apply  
drop elbows and sleeves**




**INSULATED  
PIPE CLAMP  
with EPDM**


## MULTIPLE WAYS TO APPLY ELBOWS AND SLEEVES

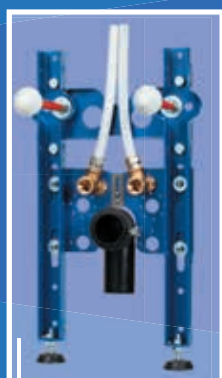


Drop elbows with water  
supply from the top

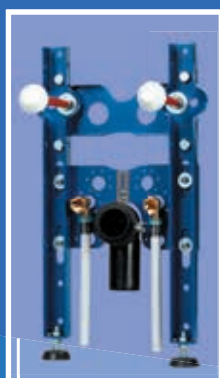

90° elbow fittings

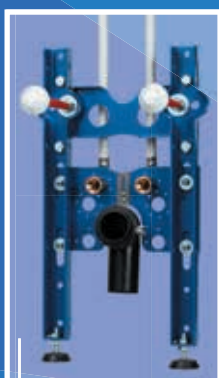


Sleeve with water  
supply from behind

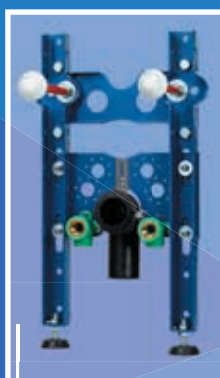

PP drop elbows



Drop elbows with water  
supply from below

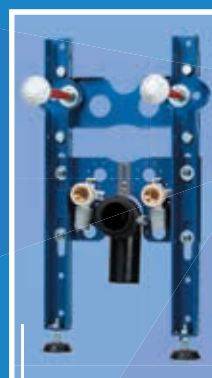


PPSU drop fittings

# SVELTA EVO




## SUPPORT BRACKET FOR WALL HUNG TOILET BOWL AND BIDET




### HANDY

Upper crossbeam specifically moulded to be easily applied on the masonry



### EASY

Upper crossbeam provided with side bendings designed to be easily walled in.




### HIGH

Its height of 660 mm makes it particularly suitable to be installed on radiant heating floors.


### QUICK

adjustment of center-to-center distance - between 180 mm and 230 mm - thanks to the holes on the lower crossbeam



### SOLID & STEADY


The connection system - with ribbed crossbeams and high L-shaped metal struts - makes installation solid and quick.



## ECONOMICAL AND UNIVERSAL


The **specific holes** set on the sides of the L-shaped metal struts make this **bracket unique on the market**.

Thanks to them it is possible to fix water supply pipes (for bidet application) easily and safely.



A **SINGLE BRACKET** to install both **WALL HUNG TOILET BOWLS AND BIDETS**

The fixing pivots can be adjusted in height thanks to the guides set on the L-shaped metal struts.

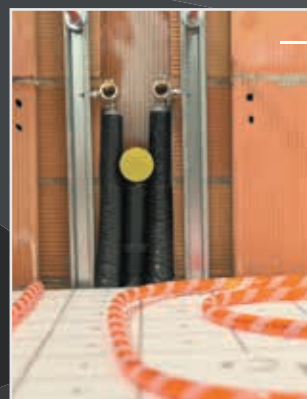

Due to the L-shaped metal struts - **660 mm high** - SVELTA EVO is particularly suitable for applications in which the bathroom fixtures must be installed on **radiant heating floors**.

# Bianca

PATENTED

## SINGLE BRACKET FOR WALL HUNG TOILET BOWL AND BIDET

### PREASSEMBLED

for a **very quick** installation

### UNIVERSAL

it matches with most of the sanitary systems produced on the market


### ADAPTABLE

To center-to-center distance from 180 mm to 230 mm



### COMPLETE

with installation accessories




Adjustable floor supports

## DOUBLE USE


### WALL HUNG BIDET

By adding the little pipe clamps included in the box, it is possible to **set the water supply pipes in 5 different positions**, according to the kind of bidet that must be installed.

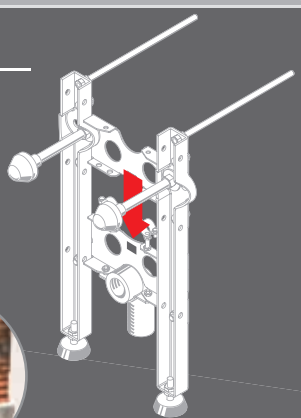


A SINGLE BRACKET to install both WALL HUNG TOILET BOWLS AND BIDETS

It only takes to **adjust the height at which the plate must be placed** in order to install either the water supply pipes or the drain pipe.

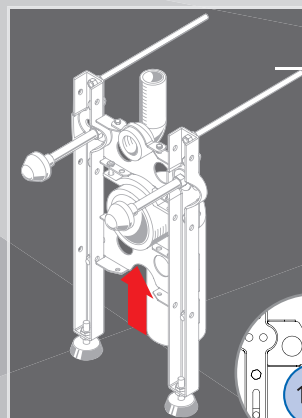

### WALL HUNG WC

The use of the specific reduction piece allows to fasten **drain pipes of both 110 mm and 90 mm.**





### AZZURRA - Universal preassembled bracket for wall hung bidet




#### APPLICATION

Wall hung bidet fastening and installation on masonry.

#### FEATURES AND BENEFITS

- > **Exclusive patent:** suitable to fasten any kind of joint, including drop elbows.
- > The plate - **vertically adjustable** - is already set at the best height for most of the bidets produced on the market. Provided with complete instructions, which include detailed dimensions of more than 300 kinds of bathroom fixtures.

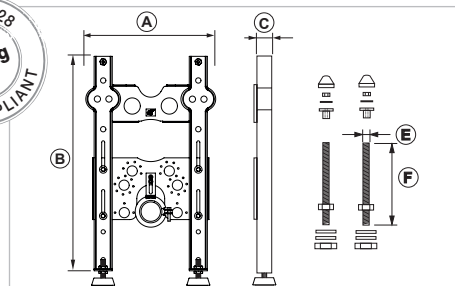

COD	TYPE	Application	A	B	C	D	E	F
020513	AZZURRA	Wall hung bidet	280	462	33,5	50	M12	180

### ROSSA - Universal preassembled bracket for wall hung toilet bowl




#### APPLICATION

Wall hung toilet bowls fastening on masonry.

#### FEATURES AND BENEFITS

- > Suitable for **center-to-center distance between 180mm and 230mm.**
- > Complete with **moulded support for drain pipe** of both 90mm and 110 mm.

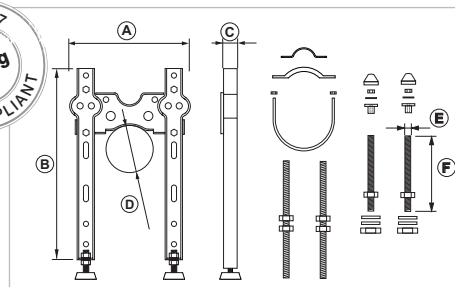

COD	TYPE	Application	A	B	C	D	E	F
020502	ROSSA	Wall hung toilet bowl	280	462	33,5	90-110	M12	180

### BIANCA - Single preassembled bracket for wall hung toilet bowl and bidet




#### APPLICATION

Wall hung toilet bowls and bidet fastening on masonry.

#### FEATURES AND BENEFITS

- > **Single** bracket for the installation of both wall hung toilet bowls and bidets.
- > **Preassembled bracket** to guarantee a very fast installation and complete with accessories.
- > **Suitable** for center-to-center distance between 180mm and 230mm.

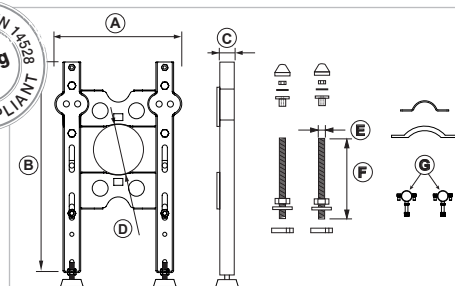

COD	TYPE	Application	A	B	C	D	E	F	G
020515	BIANCA	Wall hung toilet bowl/bidet	280	462	33,5	90-110	M12	180	25

### SVELTA - Support bracket for wall hung toilet bowl and bidet




#### APPLICATION

Wall hung toilet bowls and bidet fastening on masonry.

#### FEATURES AND BENEFITS

- > **Single** bracket to install both wall hung toilet bowls and bidets.
- > **Preassembled** (Vers. Svelta Evo 180) and complete with accessories.
- > **Suitable** for center-to-center distance between 180mm and 230mm.
- > **660mm high**, it is perfect to be installed on radiant heating floors.
- > **Side holes** on the L-shaped metal struts to fix water supply pipes (bidet installation).
- > **Side bendings** to wall the bracket in easily.

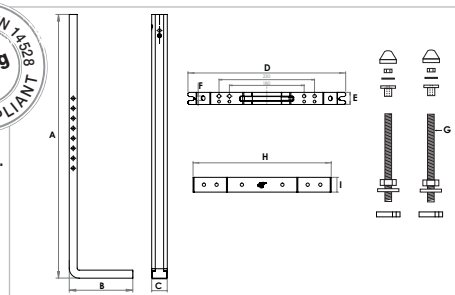

COD	TYPE	Application	A	B	C	D	E	F	G	H	I
020533	SVELTA EVO 180	Wall hung toilet bowl/bidet	660	160	39	380	29	10,5	M12x180	273	29
020537	SVELTA EVO	VWall hung toilet bowl/bidet	660	160	39	380	29	10,5	M12x180	273	29