

## WB INOX



### Wc and bidet floor fastening

#### APPLICATION

Used to fasten sanitary fixtures on the floor.


#### FEATURES AND BENEFITS

- > It ensures a **stable and reliable** sanitary floor fixing through vertical holes.
- > **Longlasting high performance** is guaranteed by its solid and anticorrosive materials.

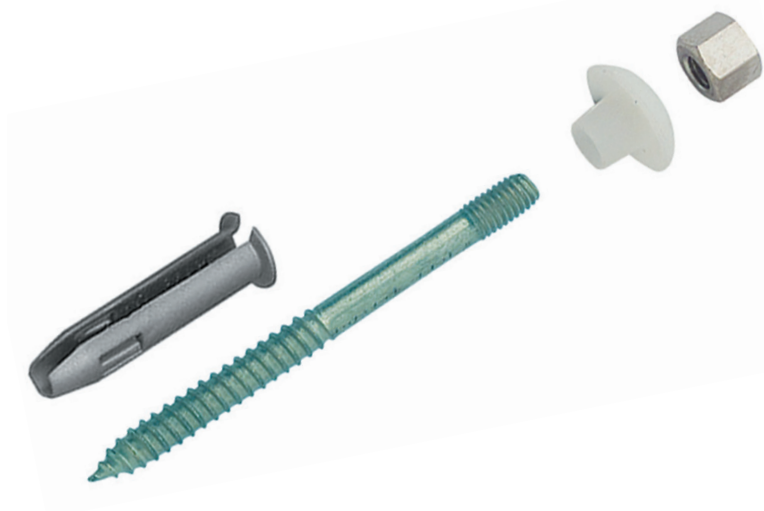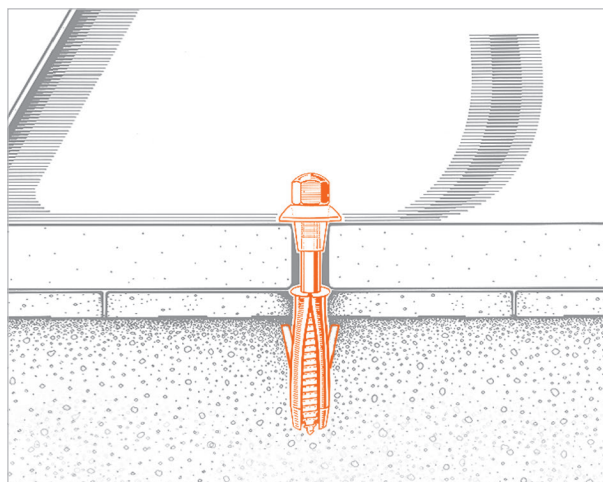

Composed of:

- double threaded screw
- Giolli plug
- socket
- M6 locking nut

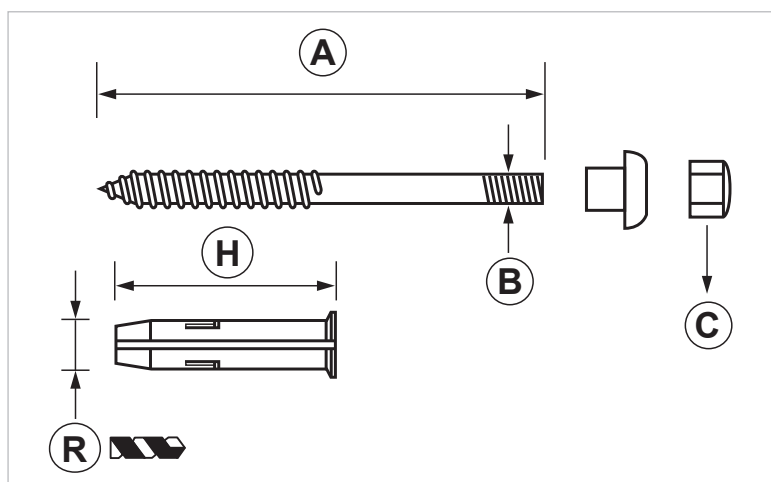

COD	TYPE	SCREWS	A	B	C	H	R
020400	WB INOX	Stainless steel AISI 430	80	M6	M6 capnut	40	8
020410	WBL INOX	Stainless steel AISI 430	100	M6	M6 capnut	40	8

# WC AND BIDET FLOOR FASTENING SANITARY FIXINGS

## MATERIALS TECHNICAL DATA

### PLUG

PP Polypropylene

### DOUBLE THREADED SCREW

Brass CW 614N EN 12164 or stainless steel AISI 430 EN 1.4016

### SOCKET

Nylon PA6


### LOCKING NUT

Nickel-plated brass

### BASE MATERIAL

Cement

## RECOMMENDED LOADS

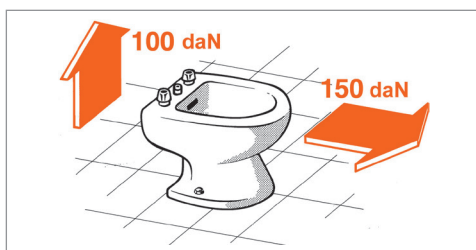

Thanks to its specific shape, the Giolli plug firmly fix the screw, fastening the sanitary permanently while also preventing it to lift off the ground.

It is suitable for floors with poor or friable foundations.

1daN=1kg.

## INSTALLATION

In order to properly install the plug, make a hole perpendicularly to the base support with the right drill bit. The hole must be cleaned up from drilling dust before applying the plug. Insert the plug and fasten the sanitary fixture.

## INSTALLING TOOLS AND RECOMMENDATION

Drill, with drill bit Ø 8.

Hammer.

## PACKAGING

In polyethylene bags | 4 items per bag

## DATE 07-2022 REV. 01

The current technical data sheet substitutes and nullifies the previous ones. Information correspond with our current knowledge of the product. It cannot lead us to any sort of responsibility or compensation.

Gia S.p.A. reserves the right of changing technical features and molds without previous notice.

Company under the management of "Ethica Global Investments S.p.A."

Gia S.p.A. – Via Sac. A. Cremona, 12 – 28069 Trecate (NO) – [www.gia.it](http://www.gia.it)